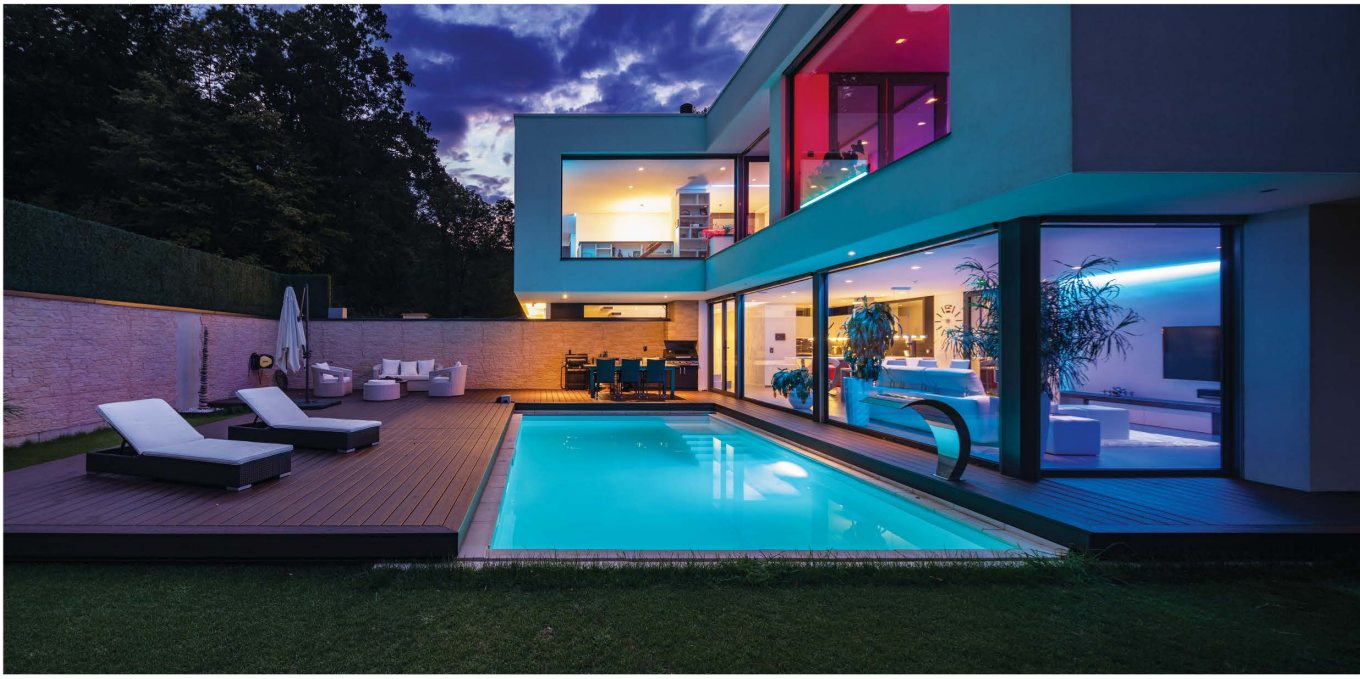

Professional Commercial Lighting Partner

Production
R&D
Lighting Planning
Service

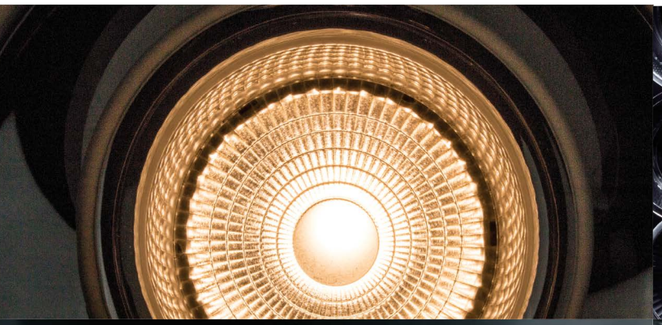




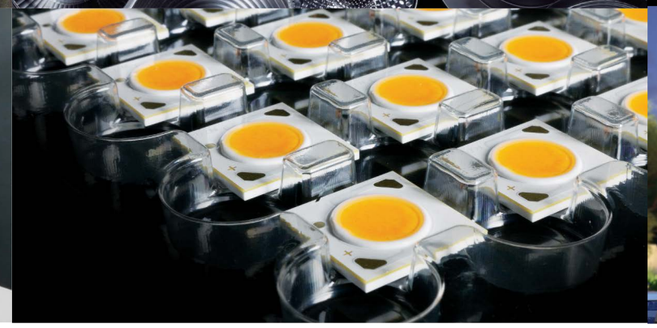
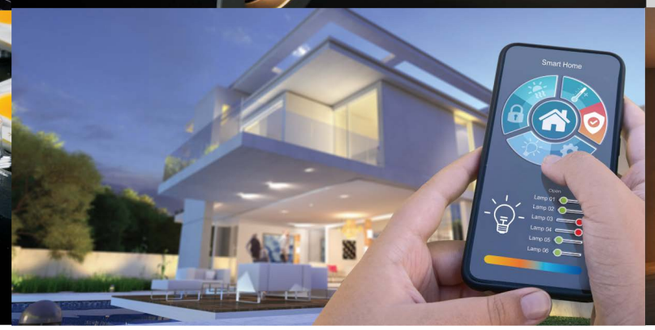

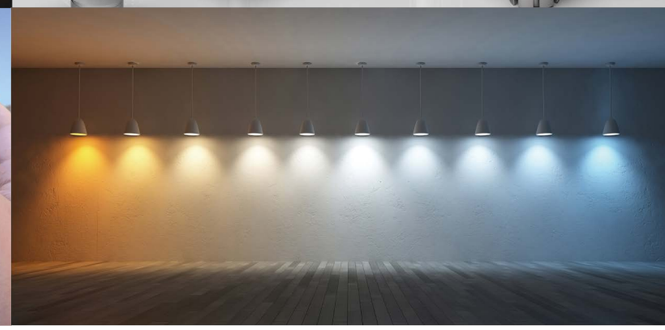

Lighting is an indispensable part of life, with a profound impact on human living and working environments. Firstly, lighting directly affects our vision. Adequate lighting enhances visual clarity, reduces eye fatigue, and contributes to increased work efficiency. Additionally, suitable lighting provides safety, reducing the occurrence of accidents.

Secondly, lighting design influences the ambiance and emotions of a space. Different lighting schemes can create various atmospheres, from cozy homes to modern commercial settings, where lighting plays a pivotal role. Lighting can also highlight artwork or architectural features, adding aesthetic value to a space.

Furthermore, lighting is crucial for energy consumption and environmental preservation. Energy-efficient lighting technologies like LEDs reduce energy usage and carbon footprint. This is crucial for addressing climate change and conserving energy resources.

Moreover, lighting plays a vital role in healthcare and education. Proper lighting enhances the medical environment for patients and improves learning outcomes. It also provides illumination during nighttime and emergencies, ensuring our safety.

In conclusion, lighting is an integral part of our lives, influencing our vision, emotions, environment, and energy consumption. Appropriate lighting design not only provides illumination but also enhances convenience and quality in our lives.

INDEX

LIGHTING GALLERY









通+

光通量 Luminous flux

光通量（Luminous flux），標準單位是流明（lumen，簡記為lm），是一種表示光功率的物理量，是表示光源整體亮度的指標。
指每單位時間內由光源所發出或由被照體所吸收的光能，可以由發光強度（Iv）對立體角的積分計算得到。

強+

光強度 Luminous intensity

發光強度（Luminous intensity），在光度學中簡稱光強或光度。
用於表示光源給定方向上單位立體角內發光強弱程度的物理量，
國際單位為燭光，符號：cd，以前又稱坎德拉

角+

光束角 Beam Angle

指於垂直光束中心線之一平面上，光強度等於50%最大光強度的二個方向之間的夾角 。
光束角反應在被照牆面上就是光斑大小和光強。同樣的光源若套用在不同角度的反射器中，光束角越大，中心光強越小，光斑越大。

照+

照度 Illuminance

是每單位面積所接收到的光通量。SI制單位是勒克斯（lx=lux）
或輻透（ph=phot），1勒克斯=1流明/平方米，1輻透=1流明/平方厘米。
居家的一般照度建議在300~500勒克斯之間。

艷+

演色性 Color Rendering Index; CRI

是一種描述光源呈現真實物體顏色能力的量值。光源的演色性越高，其顏色表現就越接近理想光源或自然光。
在比對太陽照射下能呈現出的真實程度(太陽光CRI為100)，亦稱顯色性。

遮+

遮光角 Shielding Angle

燈具為避免產生眩光的設計，其出光邊緣完全遮蔽光源方位線與水平線所形成的夾角。在一般安裝高度與視覺條件下，遮光角較大的燈具能有效防止直接眩光產生。
大於30°的遮光角被認為是商業空間燈具合理的設計，45°是最舒適的設計。

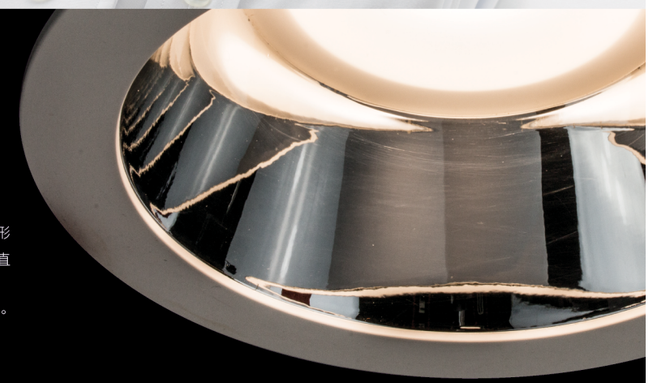

色+

色溫度 Color Temperature

色溫是將光源的色彩與放射能量的理論絕對黑體源比照的測量值，測量單位是Kelvin (°K)度。數值越低紅色越強，數值越高藍色越強黑體加熱至呈紅色時溫度約527℃即800K，其他溫度影響光色變化。 光色愈偏藍，色溫愈高；偏紅則色溫愈低。

眩。

眩光 Glare

即刺眼，是因視野內的亮度大幅超過眼睛所適應，會導致煩擾、不舒服或視力受損。
眩光依來源分成：
1.直接眩光(direct glare)：由視野內的光源直接引起。
2.反射眩光(reflected glare)：視野內物體表面的反射光而引起。

商業用照明

照度	美術館. 博物館	公共會館	旅館	公共浴室	美容院. 理髮店	餐廳. 飲食店	餐旅飲食店	戲院
1500	◎雕刻 (石. 金屬) ◎模型	◎化妝室面鏡 ◎特別展示品	◎前廳櫃檯 ◎結帳櫃檯	—	◎剪. 燙. 染. 整髮 ◎化妝	◎食品樣品櫃	—	—
750	◎雕刻 ◎畫 ◎一般陳列室	◎化妝室面鏡 ◎特別展示品 圖書閱覽室 宴會場所. 大會議場. 集會試. 餐廳	停車場. 大門. 廚房. 事務室 ◎行李櫃檯 ◎洗面鏡 宴會場所	◎櫃檯 ◎衣物櫃 ◎浴場走道	◎修臉 ◎整裝 ◎洗髮 ◎前廳掛號台	會議事 ◎書桌 ◎帳房 ◎前廳掛號台 ◎貨物收受台	◎餐桌. 廚房 ◎帳房 ◎貨物收受台	出入口. 販賣店. 樂隊區. 售票室
500	◎繪圖 (附玻框) ◎國畫 ◎工藝品 ◎一般陳列品 ◎廁所. 小集會室. 教室	禮堂. 結婚禮堂準備室 樂隊區. 洗手間	前聽. 廁所. 盥洗室 日式大房間. 餐廳	◎櫃檯 ◎衣物櫃 ◎浴場走道	◎修臉 ◎整裝 ◎洗髮 ◎前廳掛號台	集會事 ◎廚房調理室 ◎前廳掛號台 ◎貨物收貨台	◎餐桌. 廚房 ◎帳房 ◎貨物收受台	出入口. 販賣店. 樂隊區. ◎售票室
300		禮堂. 結婚禮堂準備室. 樂隊區. 洗手間	娛樂室. 更衣室. 走廊	出入口. 更衣室. 淋浴間. 泡浴槽. 廁所	店內廁所	正門. 休息室. 餐室. 洗手間	洗手間	觀眾席. 前聽休憩室. 電器室. 機械式. 洗手間. 廁所
150	◎模仿製品. 標本展示. 餐飲部. 走廊樓梯	結婚禮場. 聚會場 前廳走廊. 樓梯	客房. 樓梯. 浴室 ◎庭院重點照明	走廊	走廊. 樓梯	走廊. 樓梯	出入口走廊. 正門. 樓梯. 房間內(全般)	放映室. 控制台. 樓梯. 走廊 ◎後場作業區
75	收藏室	儲藏室	—	—	—	—	—	—
30	換燈片放映用之剪報室	—	—	—	—	—	以氣氛為主之酒吧. 咖啡廳	控制室. 放映室
10							酒廊之座位. 走廊	—
5	—		安全燈				—	觀眾席
2								

備註:1. 有◎記號的場所, 可用局部照明取得該照度
2. 白天屋外正面櫥窗的重點希望1000Lux以上
3. 重點陳列的局部照明的照度, 希望在全面照明的3倍以上

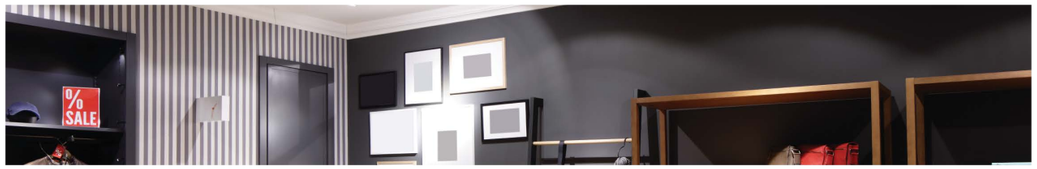

商店. 百貨. 其他

照度	一般共同事項	日用品店	超級市場	大型百貨	服飾店	文化品店	趣味休閒用品	生活專門店	高級專門店
3000	◎局部陳列室	—	◎主陳列室	◎櫥窗 ◎展示部 ◎店內重點展示	—	—	—	—	◎櫥窗之重點
1500	—			◎專櫃 ◎店內展示		舞台商品之重點		◎櫥窗之重點	◎店內重點陳列品
1000	◎重點陳列室 ◎結帳櫃檯 ◎電扶梯上下處 ◎包裝台	◎重點陳列部	店面全面(鬧區)	主商品標售. 特價品部分 ◎服務櫃台	◎重點陳列 ◎專案櫃 ◎試穿試	◎室內陳列 ◎服務櫃檯. 試穿室. 櫥窗	◎室內陳列之重點. 模特而表演場. 櫥窗	◎展示室	◎一般陳列品
750	電梯大廳. 電扶梯	◎重點部份 ◎店面	店面全面(郊區)	一般樓層之全面	店內全面 ◎特別陳列室	店內全面 ◎具鼓舞性指標之陳列	◎店內一般陳列 ◎特別陳列 ◎服務專櫃	店內全面 ◎服務專櫃	◎服務專櫃 ◎設計發表專櫃
500	◎一般陳列品 洽商室	店面全面		高樓層之全面		—	店內全面		接待室
300	接待室		—	—	—			—	店內全面
250	化妝室. 廁所. 樓梯. 走道				◎特別部之全般	◎具鼓舞性指標. 陳列部之全面	—		
150	—	—					特別部之全面		—
100	休息室. 店內全面				—	—	—		
75									

備註:1. 有◎記號的場所, 可用局部照明取得該照度
2. 白天屋外正面櫥窗的重點希望1000Lux以上
3. 重點陳列的局部照明的照度, 希望在全面照明的3倍以上

辦公室照明

照度	場所		
2000	—		
1500	辦公室(a). 營業所. 設計室. 製圖室. 正門大廳(日間)		
750	—	辦公室(b). 主管室. 會議室. 印刷室. 機械室. 電子計算機室. 控制室. 診療室	
500	禮堂. 會客室. 大廳. 餐廳. 廚房. 娛樂室. 休息室. 警衛室. 電梯走廊		
300		書庫. 會客室. 電器室. 教室. 機械室. 電梯. 雜物室	—
200	—		盥洗室. 茶水間. 浴室. 走廊. 樓梯. 廁所
150			
100	飲茶室. 休息室. 值夜班. 更衣室. 倉庫. 入口(靠車處)		—
75	安全梯		
30			

備註:1. 辦公室若是從事精細工作, 且日間室內比較黑暗, 就是要選擇(a)的標準
2. 為避免日間已適應屋外的自然光, 在進入屋內正門大廳的瞬間會有昏暗的感覺產生, 正門大廳的照度應提高, 日夜間的照度皆可以分階段來調光

工廠作業照明

照度	場所	作業
3000	◎控制室等之儀表盤及控制盤	精密機械. 電子零件製造. 印刷工廠極細之視力作業如:◎裝配(a). ◎檢查(a). ◎試驗(a). ◎篩選(a). ◎設計. ◎製圖
1500	設計室. 製圖室	纖維工廠之選別. 檢查. 印刷工廠之排字. 校正, 化學工廠之分析等細緻視力工作, 如:◎裝配(b). ◎檢查(b). ◎試驗(b). ◎篩選(b)
750	控制室	一般之製造工程等之普通視力作業如:◎裝配(c). ◎試驗(c). ◎篩選(c). ◎包裝(a). ◎倉庫內辦公
300	電器室. 空調機械室	較粗之視力工作如:◎可限定工作之. ◎包裝(b). ◎物品製造(a)
150	進出口. 走廊. 通道. 樓梯. 化妝室. 廁所. 內具作業場之倉庫	較粗之視力工作如:◎可限定工作之. ◎包裝(c). ◎綑紮(b)(c)
75	安全梯. 倉庫. 屋外動力設備	◎裝貨. 卸貨. 存貨之移動等諸作業
30	室外(通道. 警備區)	—
15		

備註:1. 有關相同作業名稱以所看對象物及作業性質之不同而有3種分別
附表中(a)是指細小. 深暗色. 對比不明顯的物件, 尤其具高增值產品. 衛生嚴謹. 高精密度. 工作時間長等作業事項
附表中(b)是屬於(a)與(c)之間的事項
附表中(c)是指粗物件. 亮麗物件. 對比明顯的物件, 尤其不具高價值的物件等作業事項
2. 具危險性的作業, 應有兩倍的照度
3. ◎記號之作業場所可用局部照明取得該照度

BIC智慧照明系統

Bluetooth Intelligent Control

智能互聯

BIC 讓照明從電路走向網路, 同時具備照明與資訊相互傳輸的多功能設備

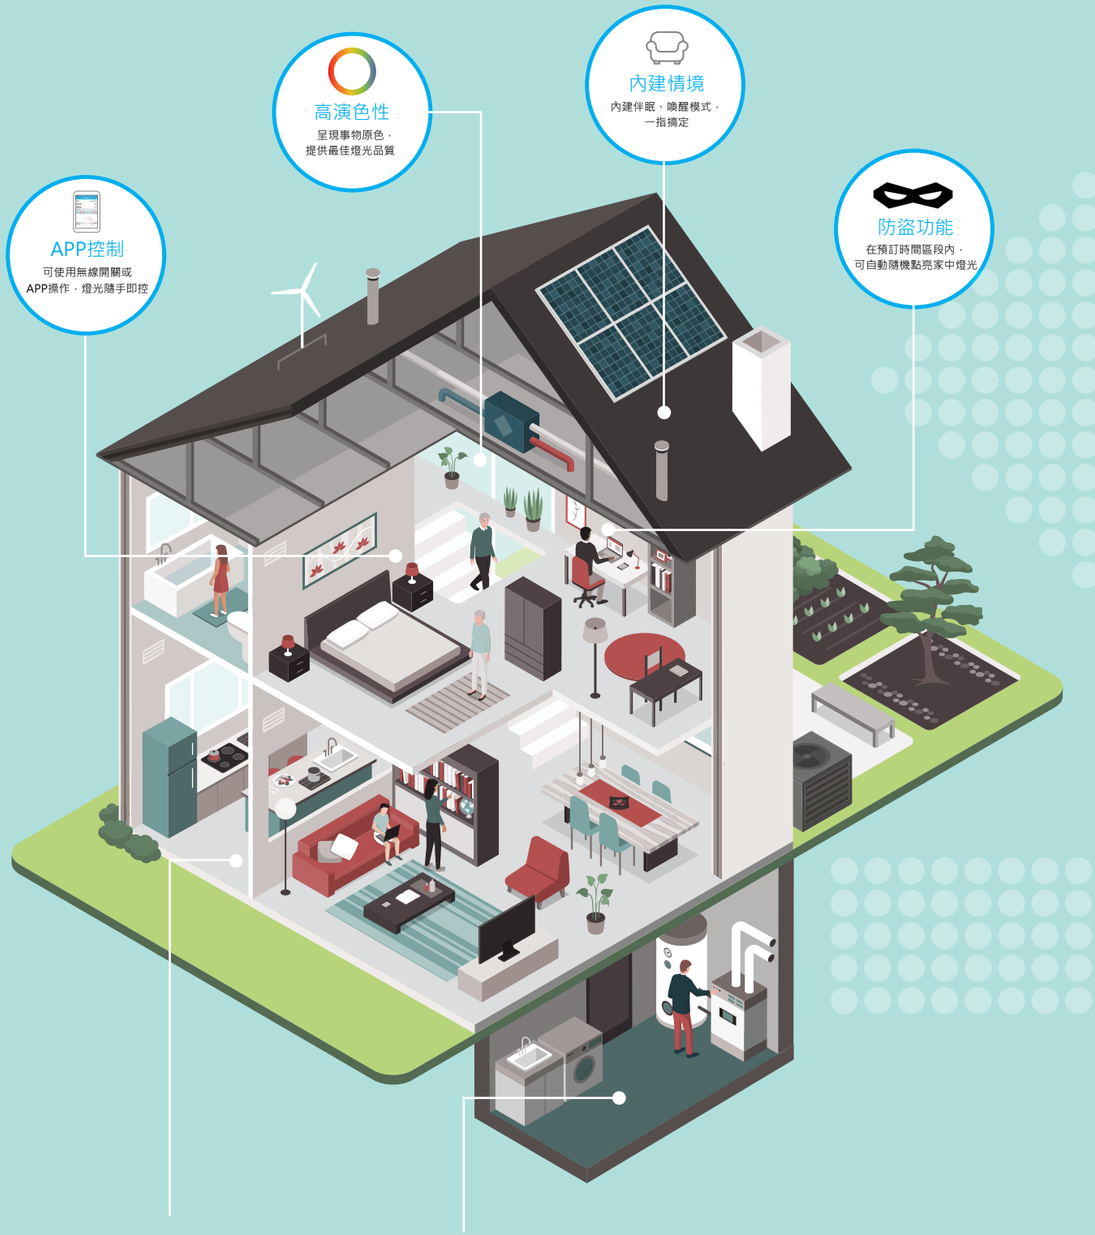

全方位整合的管理平台 | 智慧安防 | 照明控制 | 能源管控 | HVAC暖通空調 | 區域自動化 | 提供客製化解決方案

BIC智互聯無線照明

UL IoT Cyber Security SRRC

系統功能

BIC 智互聯無線照明系統具備獨立運作的能力，可藉**APP**或無線開關控制空間內的燈光。除了可以依照個人需求及喜好設定想要的燈光情境之外，內建情境熱鍵服務 **One Key Service (OKS)**，具備起床喚醒及夜間伴眠功能，以柔和漸層的燈光變化協助調整生理時鐘，提供使用者更健康舒適的照明環境。

BIC智互聯無線照明系統為居家照明提供了多樣的燈光設計選擇 ，力求以最合理的預算，使消費者得以在家中享受到健康、舒適，高品質的光環境。

呼應新照明美學以及健康照明趨勢，**BIC**智互聯無線照明系統特別強調燈光的演色性及色溫表現，並在燈光變化切換間置入漸層柔化效果，可使居家佈置色彩情境更加多元，更具高級感；無線遙控開關搭配APP控制系統，更大幅降低照明控制的設定及使用門檻，使居家照明終於可以擺脫只能在牆壁上的開關限制，在開與關之外，延伸出無限的可能性。

功能最全面 • 操作最簡便

智能 Intelligent

智能控制亮度與色溫，除提供健康舒適光環境，未來更可進行智慧學習，主動提供合適的光環境。

AI

數據 Data

以燈具建構藍芽mesh傳輸骨幹，協助採集關鍵數據。

物聯 Internet of Things

透過藍牙多對多、低功耗的特性，可對各種支援藍牙傳輸設備連結，搭配SDK、HMI、API、APP軟體發展滿足對智慧應用的需求。

定位 location

藉由藍芽Beacon定位功能，提供軌跡追蹤、路線導航、電子圍籬、訊息推播、熱點分析等室內定位服務。

BIC標準藍牙開放式平臺

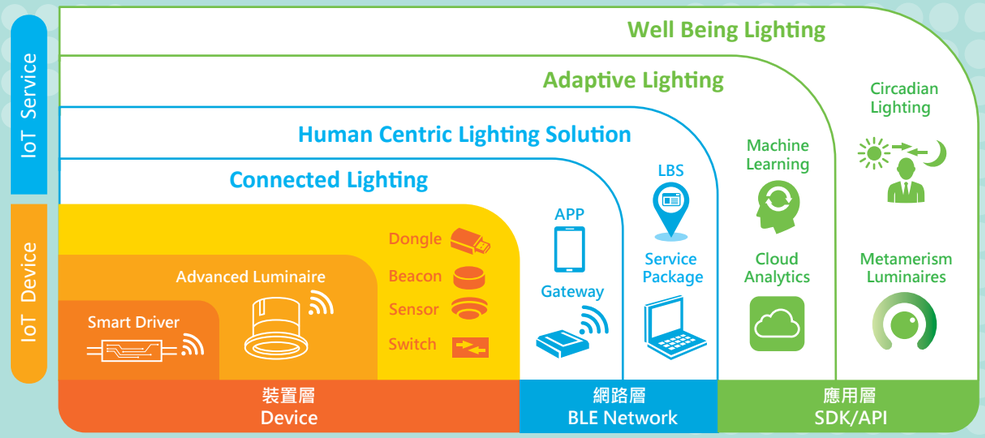

BIC智慧照明系統 Bluetooth Intelligent Control

BIC智慧照明系統優勢

BIC智慧照明系統

- 不須主機
- 高效智能
- 省去佈線
- 晝夜節律
- 快速設定
- 健康舒適

BIC區域型控制

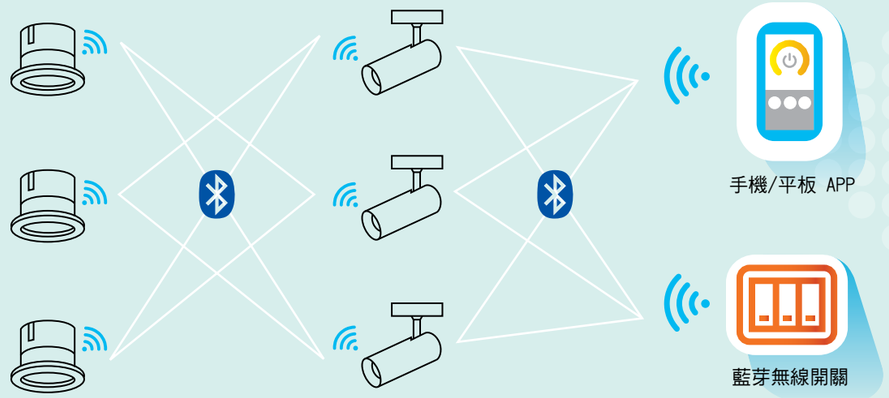

調整亮度產生的環境變化

100%亮度

60%亮度

30%亮度

情境熱鍵服務(OKS)

- 起床喚醒及夜間伴眠功能
- 可搭配晝夜節律功能，依循日出到日落光色的變化調整室內燈光

燈光情境客製化

- 可依個人喜好，在空間中依照需求提供各種變化
- 可配置不同燈光群組甚至單燈控制，靈活使用室內空間

BIC APP 介面

聰明防盜功能

- 在預訂時間區段內，可自動隨機點亮家中燈光，營造天天有人在家的情景，嚇阻歹徒入侵

使用狀況分析

- 分析不同時段的照明使用狀況
- 分析不同空間的照明使用狀況

BIC智慧照明系統應用範例

智能互聯

商場/百貨

精准行銷
促銷資訊推撥、餐廳候位通知。

資料採集
人流計算、消費者熱點及消費行為分析，分析消費導向及動線分佈等資訊。

室內導航
提供客戶最佳路徑到指定商家，方便客戶尋找商品減少導購及服務人員負擔。

人員定位
運用電子圍籬管理孩童及老人活動區域，方便調度員工支援協助客戶。

能源管理
利用數據化收集能源消耗，透過採集、追蹤、記錄、統計、分析各方面能源數據，集中監控及有效管理能源使用率。 能源管理平台的最終目的是智能化地規劃企業的能源使用效率，降低整體能源消耗、提升經濟效益。

辦公空間

個人化照明
在移動辦公室場域中，天花板上的照明系統可自動偵測是哪一位元員工在該區域範圍內，並適時調整該區域的光強度及色溫以順應不同的使用者。藉由雲端AI平臺的大資料分析及機器學習，爾後系統將會自動提供專屬該使用者的光環境。

會議室照明
無論是小組會議或團隊會議，系統會根據會議目的，參與者數量，座位分佈，多媒體設備使用狀況自行調整該區域照明。主要任務是在靈活性方面與空間的使用保持同步，使用投影機時必須使整個房間或其部分變暗以獲得更好的感知，可調光解決方案是此處的最低要求。

日光採集及晝夜節律
雲端系統藉由即時的外部大氣環境調整辦公室內的色溫及亮度，確保員工的生理時鐘與大自然的晝夜節律是同步的。

醫療/照護機構

舒適照明
模擬自然日光，協助患者睡眠、穩定情緒與恢復健康 。為患者和訪客營造愉悅的環境。改善員工的健康與專注力，降低工作失誤。

緊急呼救
防止暴力事件管理作業規範、防範設施、通報機制與人身安全之防護教育訓練，確保執行醫療業務時安全。

儀器定位
專責單位或人員負責相關設施、設備、醫療儀器、醫 療器材等之管理，降低設備遺失及盤點時間。

人員定位
利用人員定位加強病人安全(如防治意外、跌倒等)，電子圍籬管理病患入院區。可進行外包業務監督管理規範及查核紀錄。

排程管理
診間使用分析、訊息推撥、室內導航。

BIC智慧照明系統適用場域及方案

Solution Pack	健康照明						物聯網		室內定位衍生服務									
	U+		T+		Smart Control		IoT MESH		Location Based Service									
	空氣清消	表面清消	調頻	晝夜節律	時序控制	場景控制	基礎骨架	能耗分析	緊急呼救	資產定位	監測血氧機	人員定位	門禁管理	電子圍籬	室內導航	主動推播	資料採集	精準行銷
大門	O	O					O						O	O				
櫃台	O	O		O			O											
公共空間	O	O			O		O	O		O			O	O				
診間	O	O	O			O	O			O		O						
病房	O	O	O	O	O	O	O		O	O	O	O	O	O			O	
手術室	O	O					O			O		O						
急診室	O	O					O		O	O		O						
健檢中心	O	O					O		O	O		O			O			
安養中心	O	O	O	O	O		O	O	O	O	O	O	O	O			O	
日照中心	O	O	O	O	O		O	O	O	O	O	O	O	O			O	
會議室	O	O			O	O	O	O					O					
辦公區	O	O		O	O	O	O	O				O	O					
廠房	O	O		O	O		O	O		O		O	O	O	O			
購物商場	O				O		O	O						O	O	O	O	O
連鎖商店	O				O	O	O											
博物館	O				O		O			O			O	O	O	O	O	O

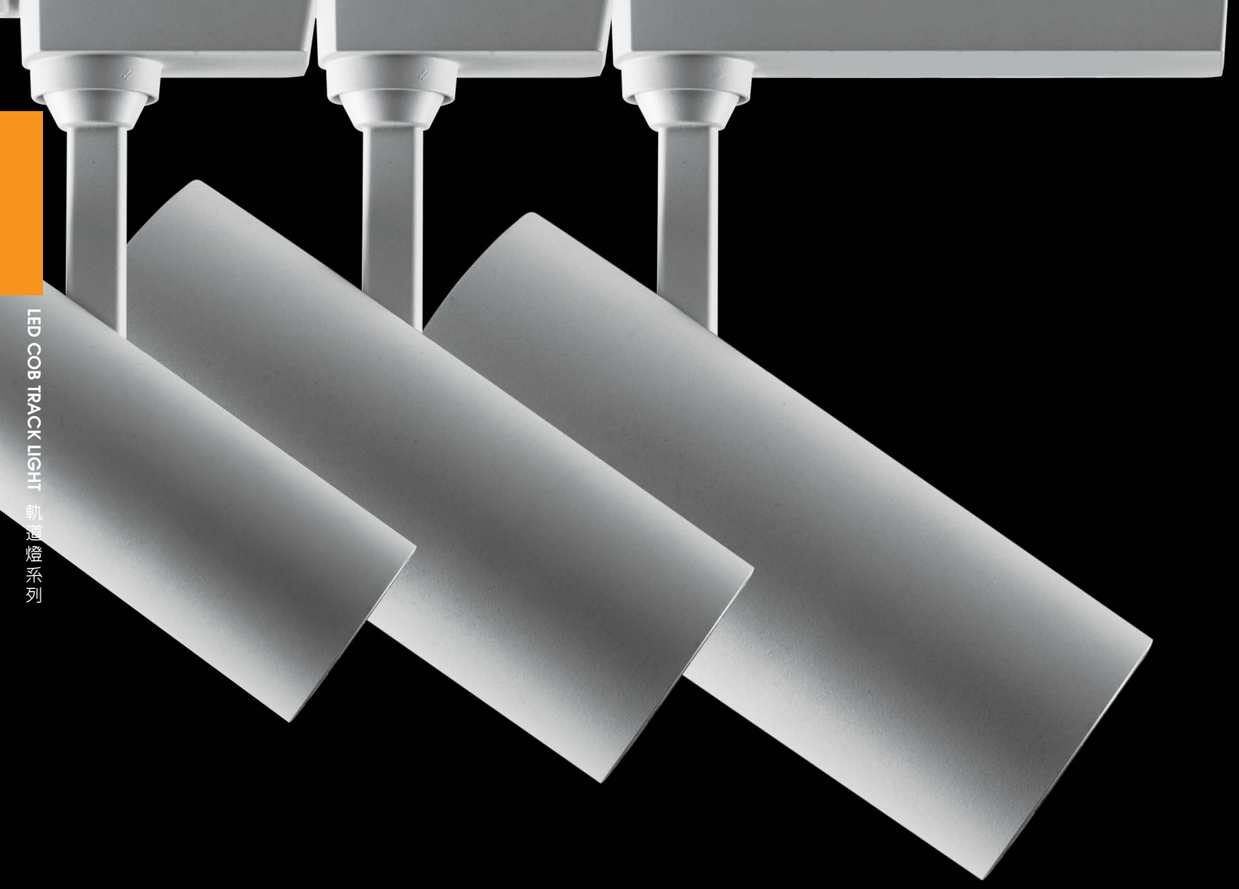

LED COB TRACK LIGHT 軌道燈系列

VARIETY OF LED TRACK LIGHTS

LED TRACK LIGHT is a modern lighting solution which can adjust the direction of the light source according to your preferences and needs. It provides a more diversified lighting effect, is more energy-efficient, and has a long lifespan, allowing it to meet various lighting requirements and bring a more elegant and fashionable look to you for a perfect visual experience.

It adopts high-efficiency LEDs, providing a lower energy consumption, more efficient heat dissipation, longer lifespan, lower maintenance costs, and softer, more even lighting effects, to create a comfortable environment. LED TRACK LIGHT is suitable for commercial spaces, such as exhibition halls, conference rooms, guest rooms, restaurants, etc., providing a three-dimensional visual experience and a comfortable atmosphere.

LED COMPACT TRACK LIGHT

The LED compact track light series features a shorter and smaller design compared to regular track lights of the same wattage. The light fixture also offers flexibility by being able to pair with various filters to meet different lighting needs. In addition, the fixture can be matched with different driver specifications and sizes, such as DALI, 0-10V, and mini track boxes, making it more versatile for various applications. Its compact appearance and diverse pairing options make it an ideal lighting solution for both commercial and residential settings.

光束角圖示
Beam angle

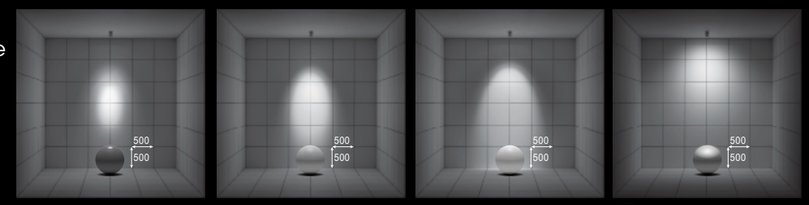

- Narrow 窄角
- Medium 中角
- Flood 寬角
- Wide Flood 廣角

6線3迴路一體式DALI超薄軌道盒
單電壓AC240V

4線3迴路一體式超薄軌道盒
單電壓AC240V

4線3迴路分體式軌道盒

4線單迴路分體式DALI軌道盒

2線單迴路一體式超薄軌道盒
單電壓AC110V / AC240V

2線單迴路分體式軌道盒

JS-C218

- LED Power / 功率

15W / 1396 Lm

- Color Temperature / 色溫

3000K Ra >90	3500K Ra >90	4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90	5000K Ra >90	Tuneable White

- Light Distribution / 投射角度

Narrow 窄角	Medium 中角	Flood 寬角	Wide Flood 廣角

- Input / 輸入電壓

110-240V / 50~60Hz	單壓110V / 50~60Hz	單壓240V / 50~60Hz

- Control / 控制

TRAIC	DALI	Tuneable White

- Color (Housing) / 機構外觀顏色

Black	White

- Accessory / 配件

A 條紋濾鏡片　B 菱格紋濾鏡片　C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

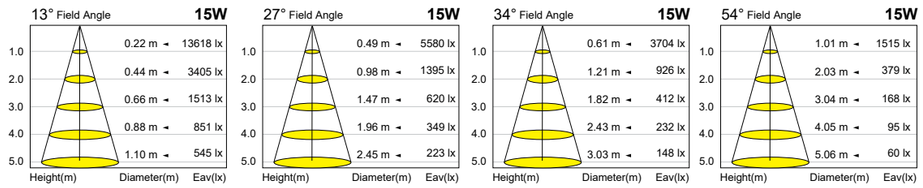

JS-C219

- LED Power / 功率

20W / 2204 Lm

- Color Temperature / 色溫

3000K Ra >90	3500K Ra >90	4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90	5000K Ra >90	Tuneable White

- Light Distribution / 投射角度

Narrow 窄角	Medium 中角	Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz	單壓110V / 50~60Hz	單壓240V / 50~60Hz

- Control / 控制

TRAIC	DALI	Tuneable White

- Color (Housing) / 機構外觀顏色

Black	White

- Accessory / 配件



A 條紋濾鏡片
B 菱格紋濾鏡片
C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

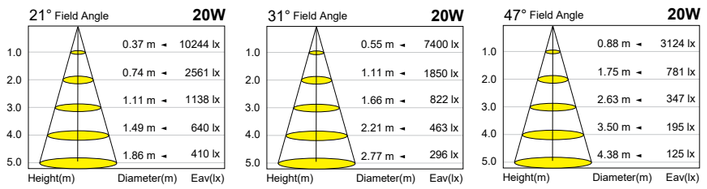

JS-C221

- LED Power / 功率

30W / 3087 Lm

- Color Temperature / 色溫

3000K Ra >90	3500K Ra >90	4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90	5000K Ra >90	Tuneable White

- Light Distribution / 投射角度

Narrow 窄角	Medium 中角	Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz	單壓110V / 50~60Hz	單壓240V / 50~60Hz

- Control / 控制

DALI	Tuneable White

- Color (Housing) / 機構外觀顏色

Black	White

- Accessory / 配件



A 條紋濾鏡片
B 菱格紋濾鏡片
C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

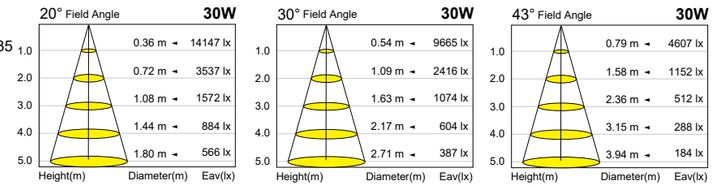

LED OPTICAL ZOOM TRACK LIGHT

LED Optical Zoom Track Light is a lighting product with a unique feature of adjustable beam angles, ranging from 10 to 50 degrees. This design allows for precise lighting for different objects, achieving optimal illumination. Compared to traditional lighting fixtures, LED Optical Zoom Track Light provides more flexible and versatile lighting effects. With its attractive appearance and high-quality manufacturing, this product is convenient to use and can be applied in various settings, such as showrooms, art galleries, restaurants, and boutiques, providing users with a high-quality lighting experience. Overall, LED Optical Zoom Track Light is an excellent lighting product that can help users achieve better and more varied lighting effects.

光學變焦 / Optical Zoom

將調焦環右轉到底 ,透鏡前移即呈現窄角光束角

將調焦環左轉到底 ,透鏡後移即呈現廣角光束角

旋轉調焦前環,參考前環角度標記可自行選擇窄角~寬角光束角

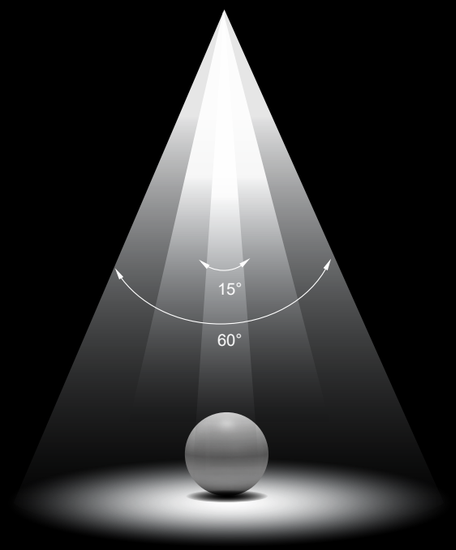

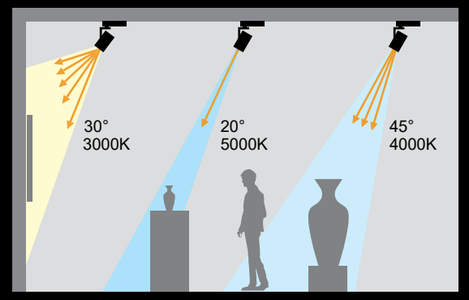

調焦型投射軌道燈的優點,可自行根據被照物的大.小.高.低.調整適合的光束角,配合調光/調色光源,達到同一盞燈具同時滿足各式空間對照明的多變靈活要求

光束角圖示 / Beam angle

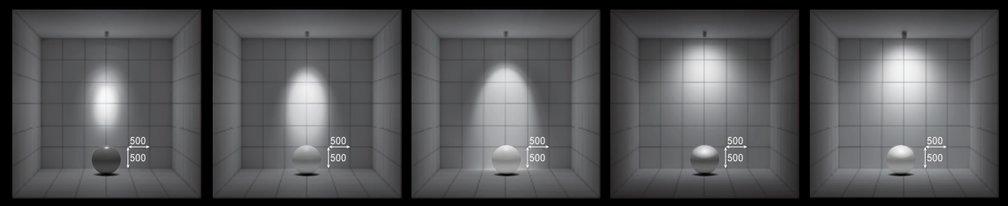

20° 30° 40° 50° 60°

JS-C271

- LED Power / 功率

12W / 763 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White 2700~6000K

- Light Distribution / 投射角度

optical zoom 20°~60° 調焦

- Input / 輸入電壓

110-240V / 50~60Hz | 單壓110V / 50~60Hz | 單壓240V / 50~60Hz

- Control / 控制

TRAIC | DALI | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

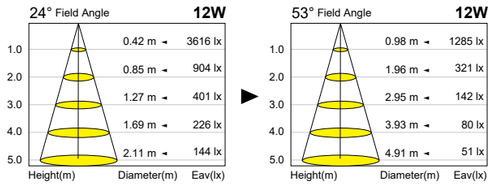

JS-C272

- LED Power / 功率

20W / 1515 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

optical zoom 20°~60° 調焦

- Input / 輸入電壓

110-240V / 50~60Hz | 單壓110V / 50~60Hz | 單壓240V / 50~60Hz

- Control / 控制

TRAIC | DALI | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

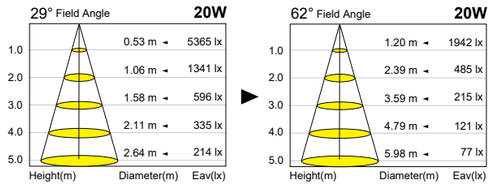

JS-C273

- LED Power / 功率

30W / 2463 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

optical zoom 20°~60° 調焦

- Input / 輸入電壓

110-240V / 50~60Hz | 單壓110V / 50~60Hz | 單壓240V / 50~60Hz

- Control / 控制

DALI | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

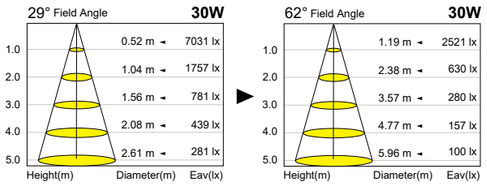

LED RADIATING FIN TRACK LIGHT

The LED Radiating Fin Track Light is an exceptional lighting solution known for its lightweight design and outstanding heat dissipation performance. This lighting fixture ingeniously employs advanced finned heat sink technology, with these fins meticulously arranged on the fixture's casing to significantly increase surface area and effectively enhance heat dissipation. This design not only ensures the LED light's longevity and stability but also maintains exceptional performance during extended periods of operation.

JS-C281

- Max power / 最大功率
  - 20W / 2058 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JS-C282

- Max power / 最大功率
  - 30W / 3226 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JS-C283

- Max power / 最大功率
  - 35W / 3919 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JS-C285

- Max power / 最大功率
  - 20W / 2058 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JS-C286

- Max power / 最大功率
  - 30W / 3226 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JS-C287

- Max power / 最大功率
  - 35W / 3919 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





LED COB TRACK LIGHT 軌道燈系列

LED COB TRACK LIGHT

The LED COB TRACK LIGHT is an integrated lighting solution that revolutionizes traditional track systems by eliminating the conventional track box, achieving a sleek and lightweight design. This fixture ingeniously combines the power supply and luminaire into one unit, eliminating complex installation steps for easier setup and application. Additionally, its lightweight design reduces space occupancy, enhancing aesthetics and minimalism. Whether in commercial or residential settings, the LED COB TRACK LIGHT offers exceptional lighting experiences with its exquisite illumination effects and track-box-free design.

JS-C228

- LED Power / 功率

10W / 820 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Narrow 窄角 | Medium 中角 | Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

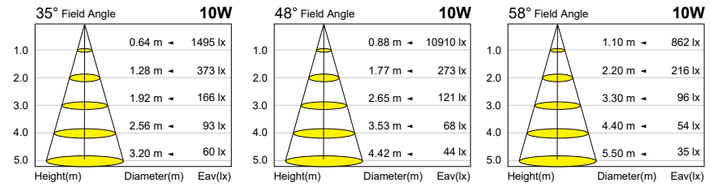

JS-C229

- LED Power / 功率

15W / 1028 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Narrow 窄角 | Medium 中角 | Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

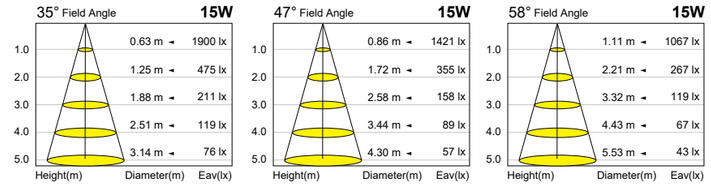



2線單迴路迷你軌道盒

2線單迴路一體式超薄軌道盒(單電壓專用)

Optimized for COB light sources, this spotlight features a lens that provides point distribution comparable to glare-capped fixtures. With its minimal form factor and single arm design, this spotlight is ideal for creating precise lighting effects in spaces with subdued ambient lighting, such as brand shops consisting only of spotlight fixtures or tranquil dining establishments.

JS-C257

- LED Power / 功率
  - 10W / 1046 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz | 單壓110V / 50~60Hz | 單壓240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

埋入式底座

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線







JS-C258

- LED Power / 功率
  - 18W / 1624 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz | 單壓110V / 50~60Hz | 單壓240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

埋入式底座

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線







JS-C259

- LED Power / 功率
  - 30W / 3226 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz | 單壓110V / 50~60Hz | 單壓240V / 50~60Hz
- Control / 控制
  - DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

埋入式底座

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線







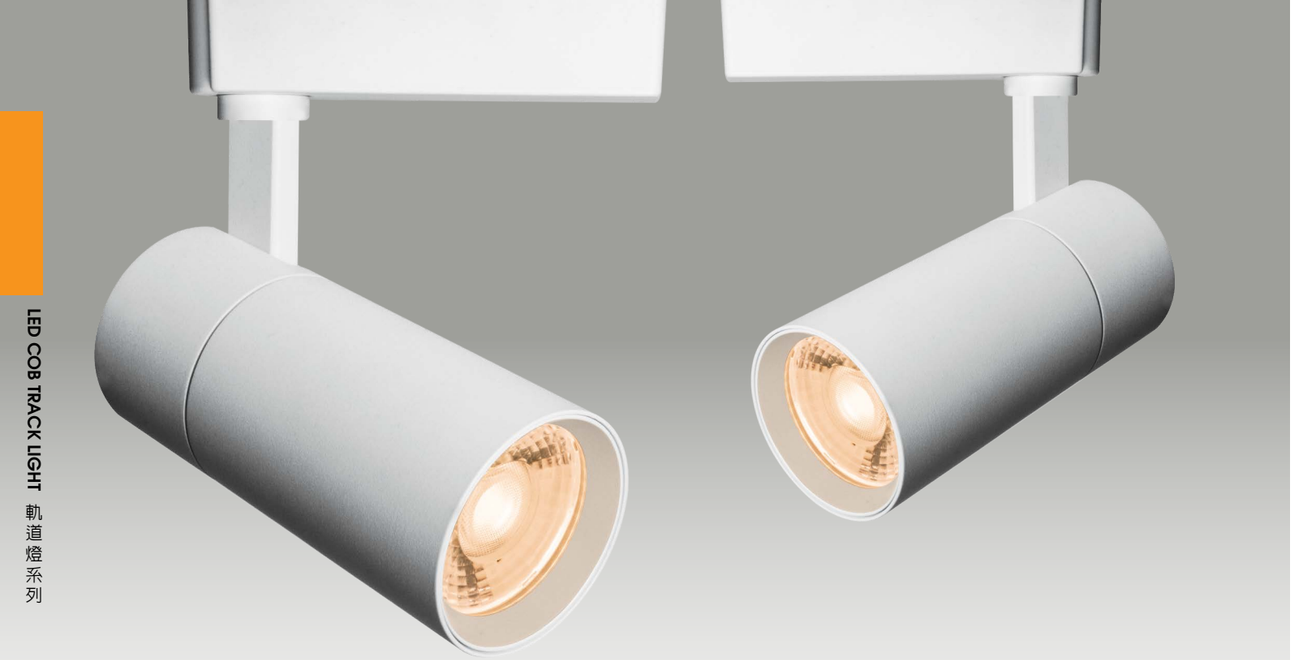

Optimized for COB light sources, this spotlight features a lens that provides point distribution comparable to glare-capped fixtures. With its minimal form factor and single arm design, this spotlight is ideal for creating precise lighting effects in spaces with subdued ambient lighting, such as brand shops consisting only of spotlight fixtures or tranquil dining establishments.

JS-C262

- LED Power / 功率
  - 12W / 862 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

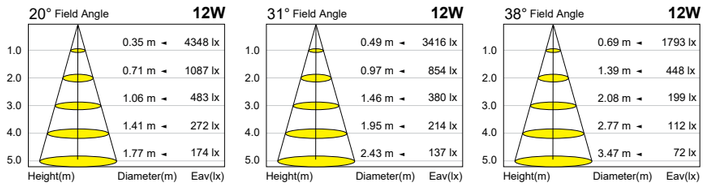

JS-C263

- LED Power / 功率
  - 20W / 1809 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

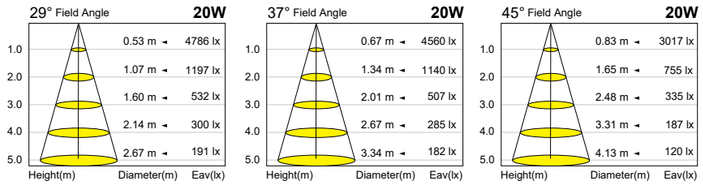

JS-C264

- LED Power / 功率
  - 30W / 2509 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

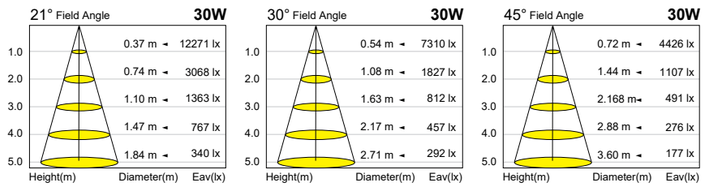

JS-C241

- LED Power / 功率

5W / 221 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-C231

- LED Power / 功率

8W / 373 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-C236

- LED Power / 功率

8W / 515 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-C237

- LED Power / 功率

10W / 610 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-C201

- LED Power / 功率
  - 8W / 792 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件



C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

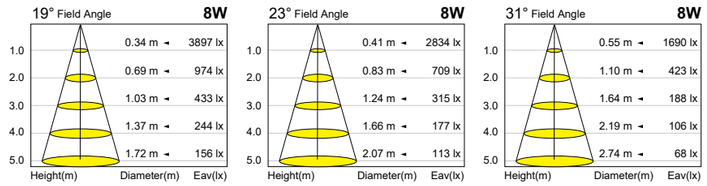

JS-C212

- LED Power / 功率
  - 15W / 1089 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

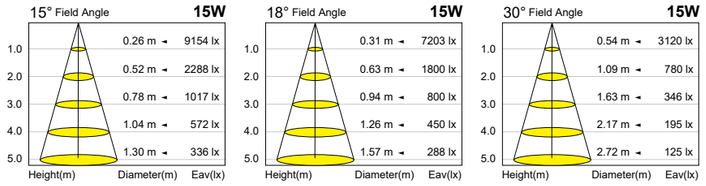

JS-C202

- LED Power / 功率
  - 15W / 1305 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件



C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

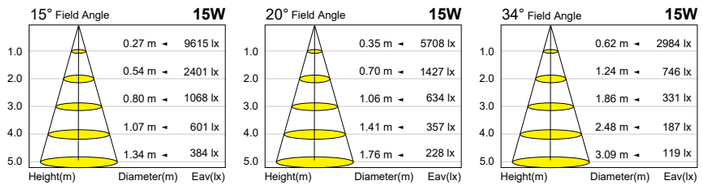

JS-C230

- LED Power / 功率
  - 12W / 1140 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件



C 蜂窩型防眩網

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

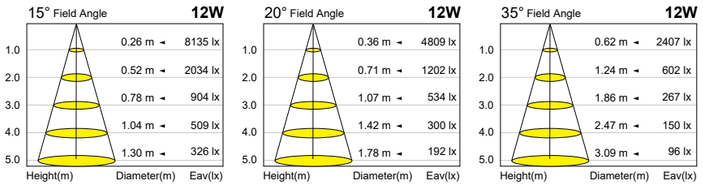

LED COB TRACK LIGHT 軌道燈系列

JS-C220

- LED Power / 功率

12W / 1190 Lm

- Color Temperature / 色溫

3000K Ra >90	3500K Ra >90	4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90	5000K Ra >90

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black	White

- Accessory / 配件

可選擇明裝固定式

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



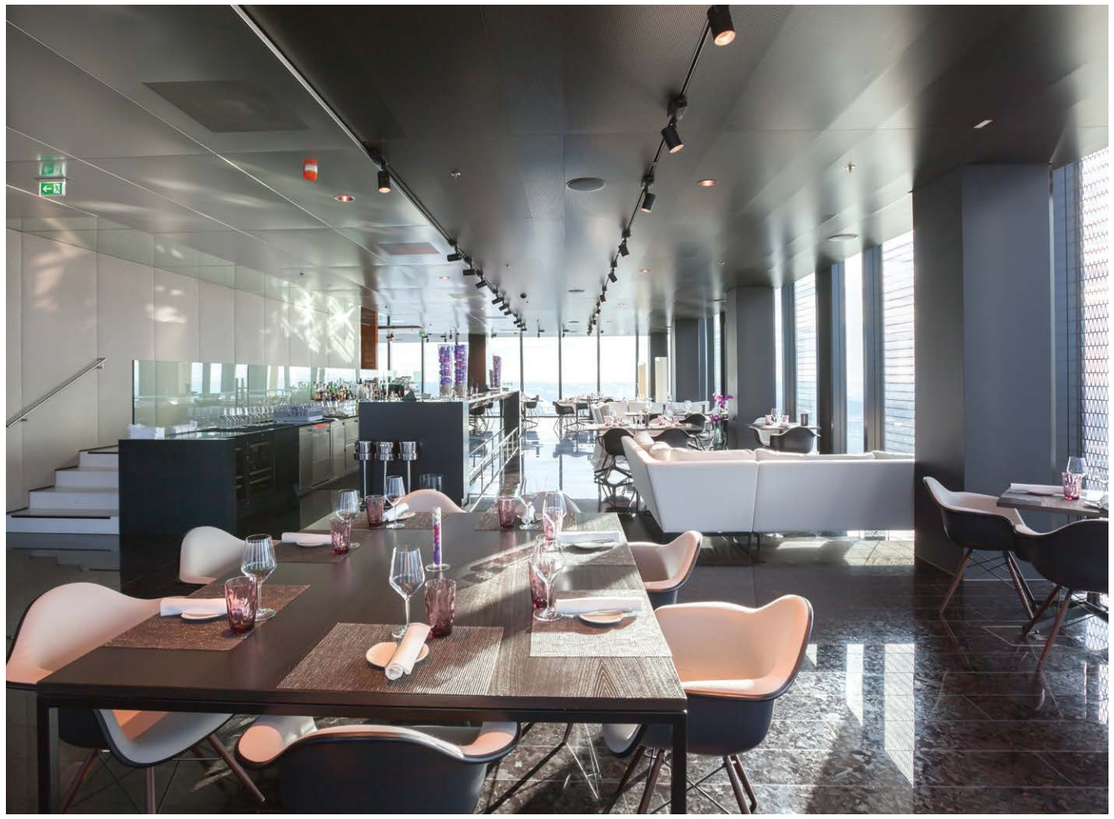

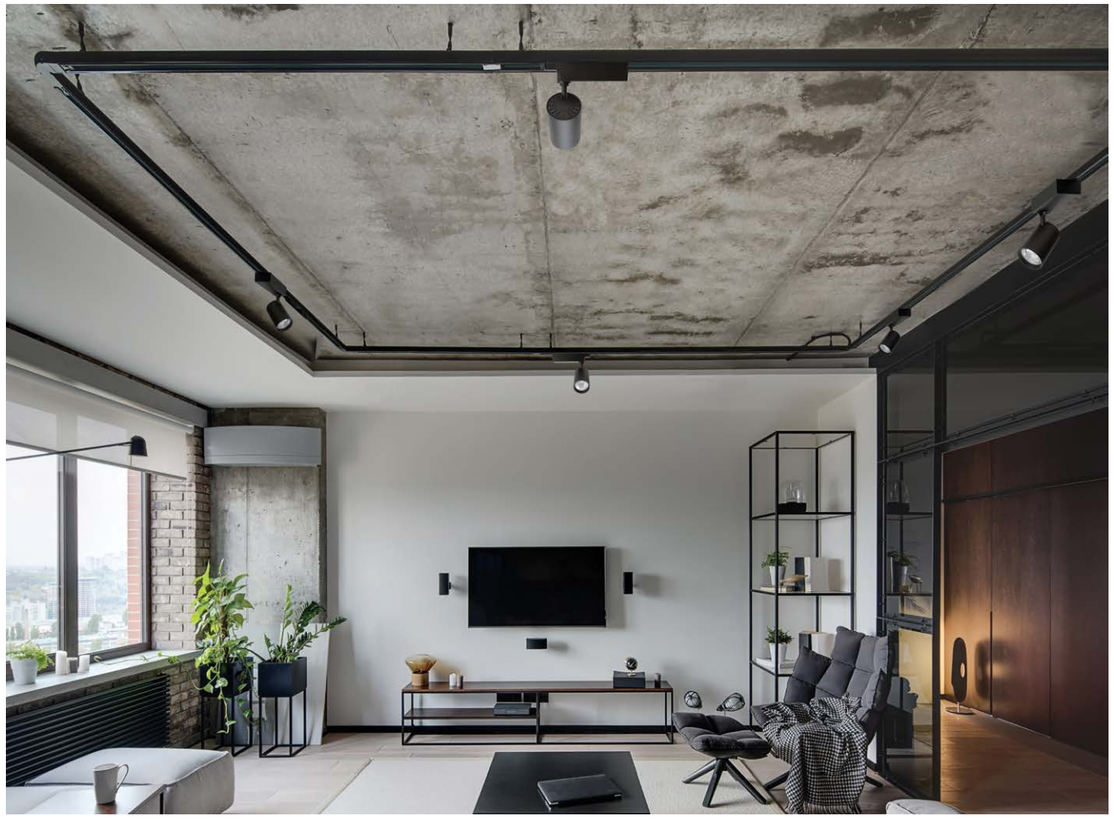

LED COB TRACK LIGHT 軌道燈系列

LED SMD TRACK LIGHT

The LED SMD TRACK LIGHT is an advanced lighting solution that uniquely incorporates Surface Mount Device (SMD) LED technology, combining efficient illumination and elegant aesthetics. Widely utilized in both commercial and residential environments, the LED SMD TRACK LIGHT leverages the advantages of LED SMD technology for a sleeker and lighter design, saving space while enhancing visual appeal. The compact LED SMD chips excel in producing uniform and high-brightness illumination, creating a comfortable lighting atmosphere. Moreover, their energy-saving features and extended lifespan contribute to reduced maintenance costs, offering long-term benefits.

JS-209

- LED Power / 功率
  - 6W / 450 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-210

- LED Power / 功率
  - 9W / 740 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED SMD TRACK LIGHT SMD 軌道燈系列

JS-212

- LED Power / 功率
  - 12W / 960 Lm
- Color Temperature / 色溫
  - 3000K Ra >80
  - 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80
  - 4000K Ra >80
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - Black
  - White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-C213

- LED Power / 功率
  - 15W / 1280 Lm
- Color Temperature / 色溫
  - 3000K Ra >80
  - 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80
  - 4000K Ra >80
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - Black
  - White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-216

- LED Power / 功率
  - 15W / 1280 Lm
- Color Temperature / 色溫
  - 3000K Ra >80
  - 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80
  - 4000K Ra >80
- Light Distribution / 投射角度
  - Narrow 窄角
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - Black
  - White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

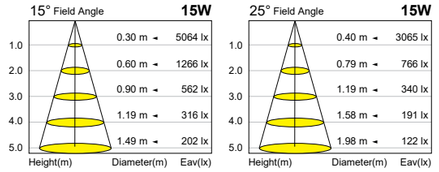

JS-215

- LED Power / 功率
  - 12W / 723 Lm
- Color Temperature / 色溫
  - 3000K Ra >80
  - 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80
  - 4000K Ra >80
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - Black
  - White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED SMD TRACK LIGHT SMD 軌道燈系列

JS-225

- LED Power / 功率

9W / 740 Lm

- Color Temperature / 色溫

3000K Ra >80 | 5700K Ra >80

- Color Options / 訂製色溫

2700K Ra >80 | 4000K Ra >80

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-226

- LED Power / 功率

12W / 960 Lm

- Color Temperature / 色溫

3000K Ra >80 | 5700K Ra >80

- Color Options / 訂製色溫

2700K Ra >80 | 4000K Ra >80

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-227

- LED Power / 功率

15W / 1280 Lm

- Color Temperature / 色溫

3000K Ra >80 | 5700K Ra >80

- Color Options / 訂製色溫

2700K Ra >80 | 4000K Ra >80

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-228

- LED Power / 功率

12W / 723 Lm

- Color Temperature / 色溫

3000K Ra >80 | 5700K Ra >80

- Color Options / 訂製色溫

2700K Ra >80 | 4000K Ra >80

- Light Distribution / 投射角度

Wide Flood 泛光

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JS-755

- LED Power / 功率

GU10

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JS-765

- LED Power / 功率

GU10

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JS-766

- LED Power / 功率

MR16 | 12W模組

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JS-751

- LED Power / 功率

AR111

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JS-754

- LED Power / 功率

GU10 | MR16

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JS-756

- LED Power / 功率

GU10 | MR16

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JS-758

- LED Power / 功率

GU10 | MR16

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JS-759

- LED Power / 功率

AR111 15W MAX

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



LED SMD TRACK LIGHT SMD 軌道燈系列

JS-760

- LED Power / 功率

AR111

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black	White

- Dimensions / 尺寸線圖



JS-761

- LED Power / 功率

E27

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black	White

- Dimensions / 尺寸線圖



JS-762

- LED Power / 功率

E27

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black	White

- Dimensions / 尺寸線圖



JS-764

- LED Power / 功率

GU10	MR16

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black	White

- Dimensions / 尺寸線圖



LED ADJUSTABLE DOWNLIGHT 可擺角崁燈系列

BEST LED DOWNLIGHT

LED DOWNLIGHT is a type of recessed ceiling light that has become increasingly popular in recent years due to its energy efficiency and long lifespan. It is widely used in commercial and residential settings, such as hotels, restaurants, homes, and offices. In addition to providing excellent lighting, it also creates a modern and stylish atmosphere.

As technology continues to advance, the future of LED DOWNLIGHT is promising. With the development of smart lighting systems, LED DOWNLIGHT can be controlled remotely and even interact with other devices, providing a more convenient and personalized lighting experience. Furthermore, the use of sustainable materials in the manufacturing process will enhance its environmental performance. As such, LED DOWNLIGHT will play an important role in the future of energy-efficient and sustainable lighting.

LED ADJUSTABLE DOWNLIGHT 可擺角坎燈系列

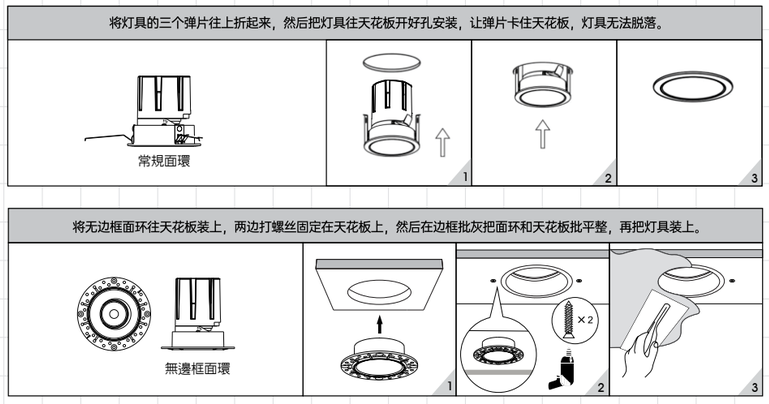

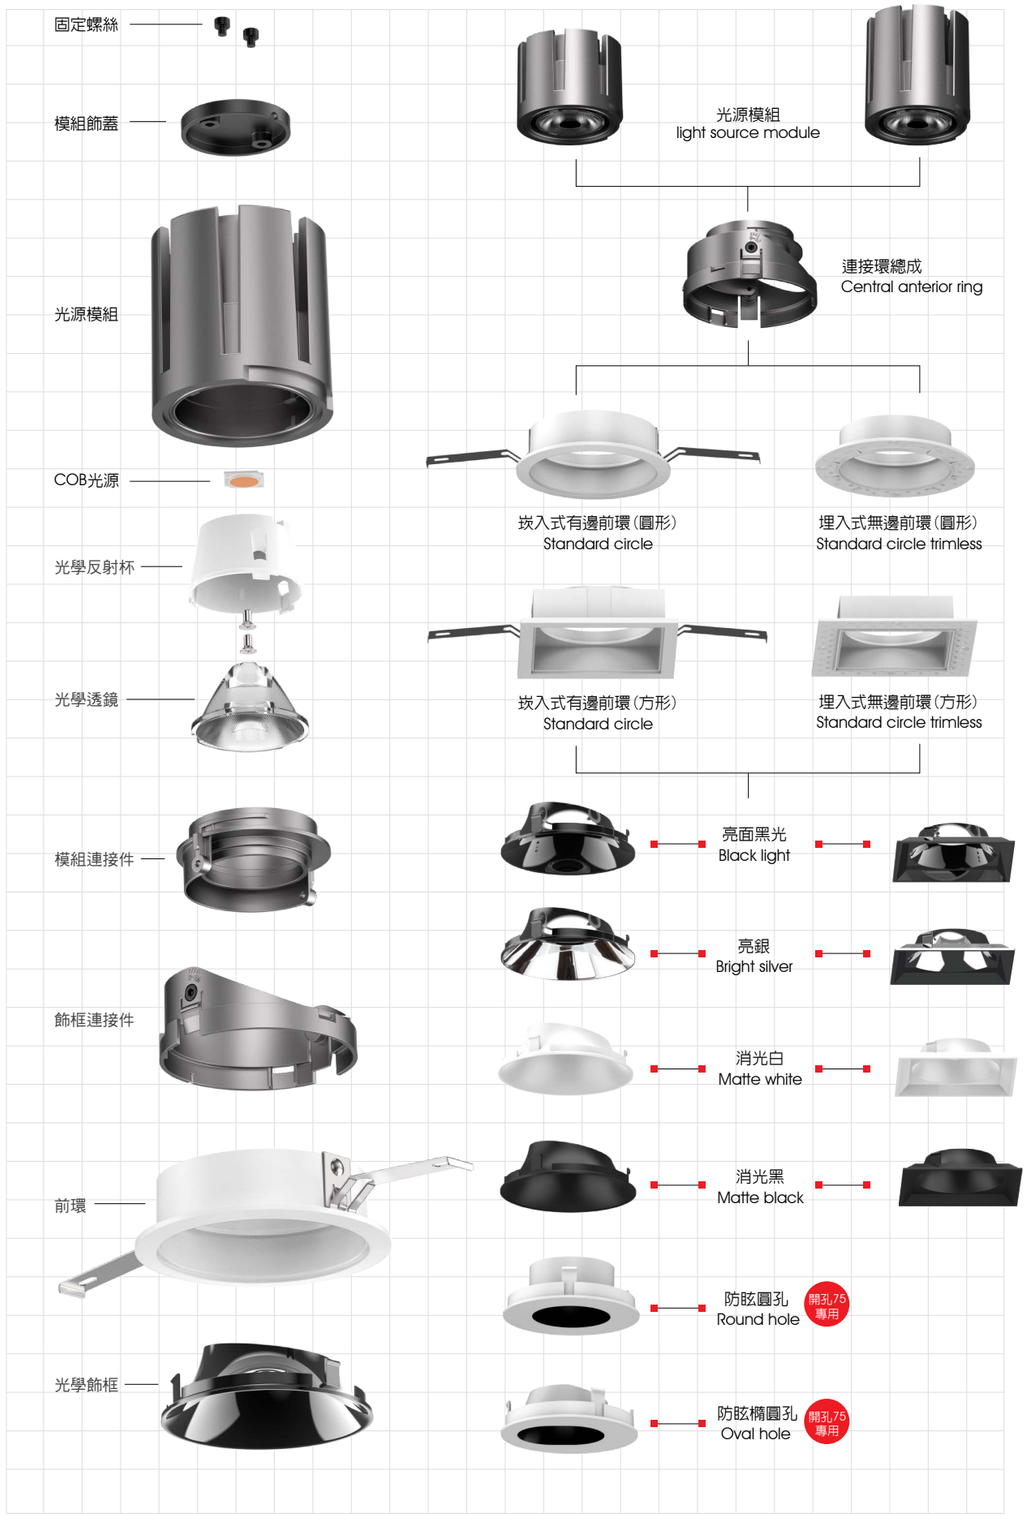

LED ADJUSTABLE DOWNLIGHT 可擺角崁燈系列

JD-C385

- LED Power / 功率
  - 6W / 406 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø55

UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattern / 配光曲線

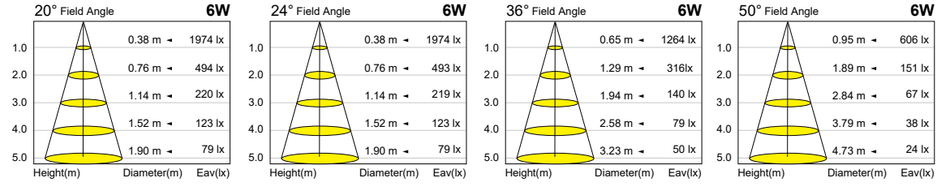

JD-C386

- LED Power / 功率
  - 12W / 827 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattern / 配光曲線

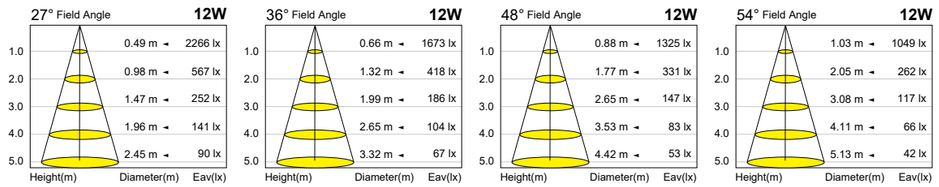

JD-C387

- LED Power / 功率
  - 20W / 1360 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattern / 配光曲線

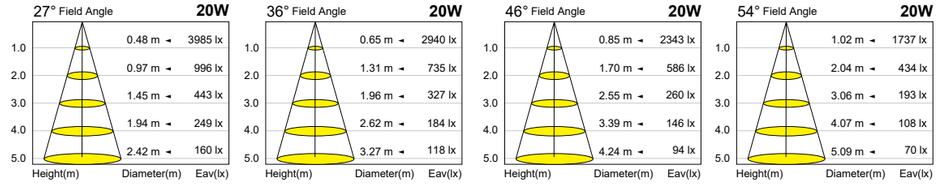

JD-C388

- LED Power / 功率
  - 30W / 2576 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattern / 配光曲線

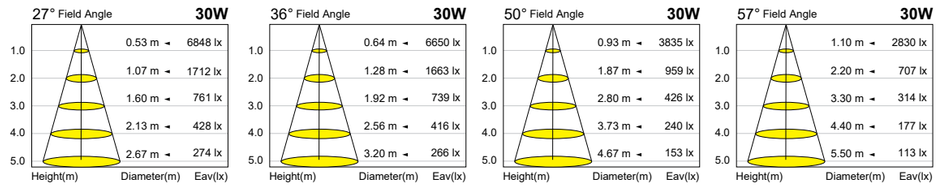

LED ADJUSTABLE DOWNLIGHT 可擺角崁燈系列

JD-C385R

- LED Power / 功率
  - 6W / 406 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø55

無邊框 埋入式 | UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

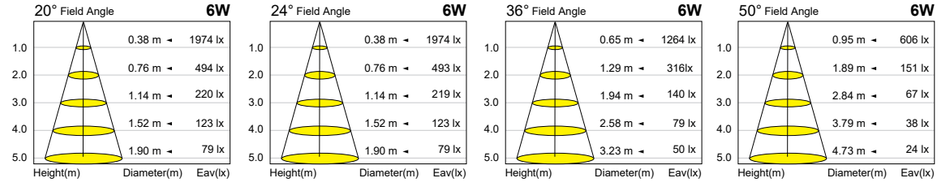

JD-C387R

- LED Power / 功率
  - 20W / 1360 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

無邊框 埋入式 | UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

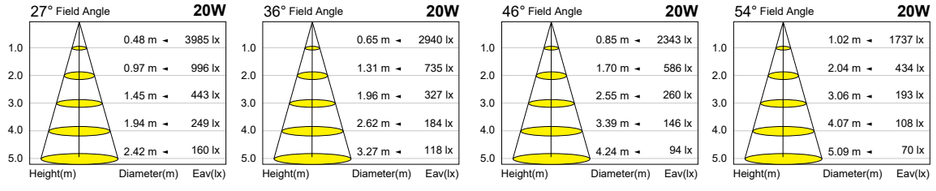

JD-C386R

- LED Power / 功率
  - 12W / 827 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

無邊框 埋入式 | UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

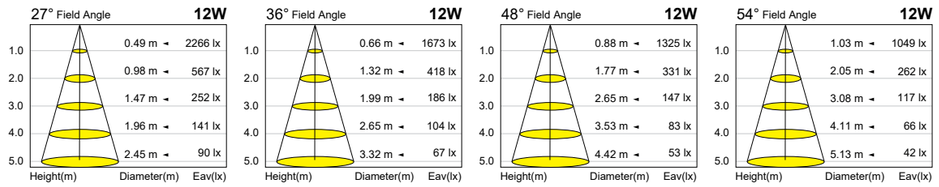

JD-C388R

- LED Power / 功率
  - 30W / 2576 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

無邊框 埋入式 | UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

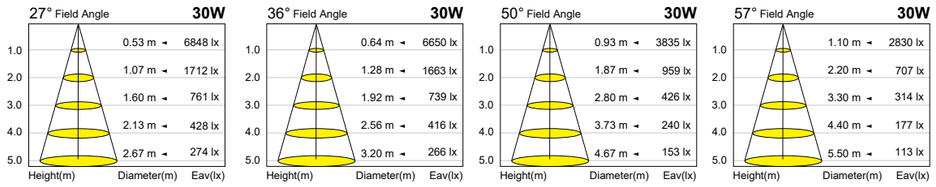

JD-C385Y

- LED Power / 功率
  - 6W / 406 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - 55x55

UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

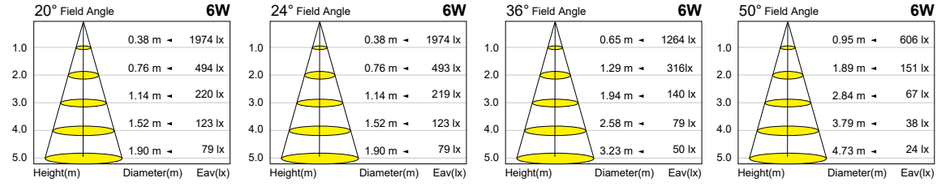

JD-C386Y

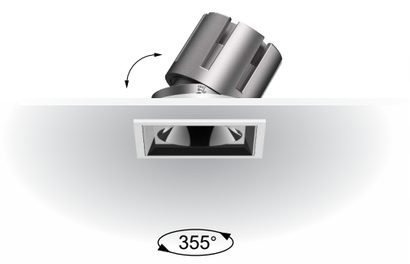

- LED Power / 功率
  - 12W / 827 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - 75x75

UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

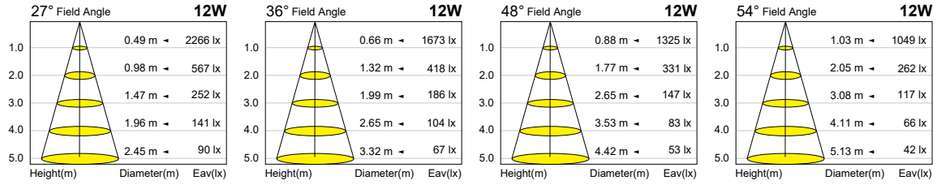

JD-C387Y

- LED Power / 功率
  - 20W / 1360 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - 75x75

UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

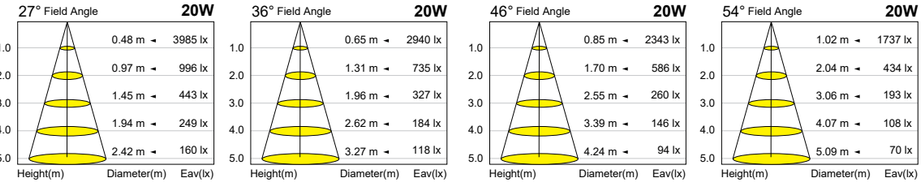

JD-C388Y

- LED Power / 功率
  - 30W / 2576 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - 95x95

UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

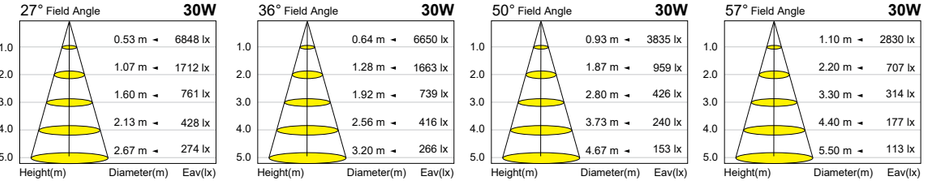

JD-C385S

- LED Power / 功率
  - 6W / 406 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - 55x55

無邊框埋入式 | UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

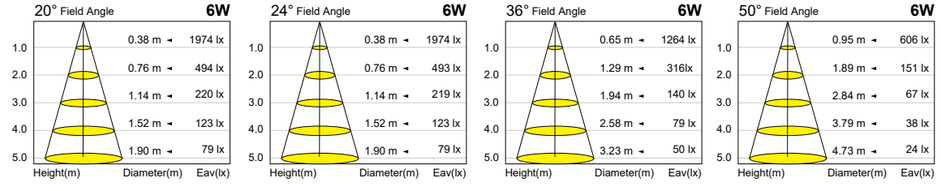

JD-C386S

- LED Power / 功率
  - 12W / 827 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - 75x75

無邊框埋入式 | UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

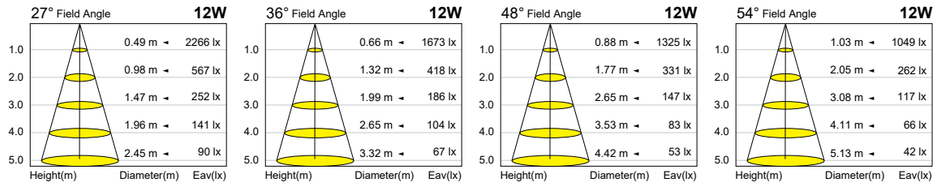

JD-C387S

- LED Power / 功率
  - 20W / 1360 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - 75x75

無邊框埋入式 | UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

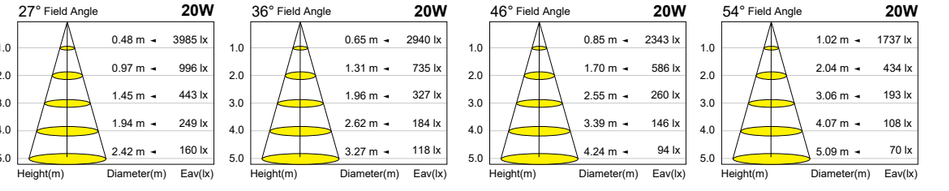

JD-C388S

- LED Power / 功率
  - 30W / 2576 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角 | Wide Flood 廣角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - 95x95

無邊框埋入式 | UGR<19 | 黑光技術 | 可擺角 | 訂製品 Made to order

- Dimensions / 尺寸線圖



- Accessory / 配件



- Light Pattem / 配光曲線

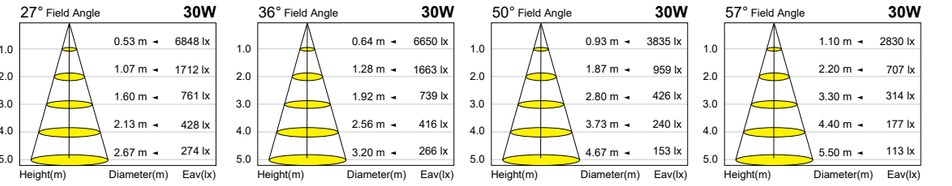

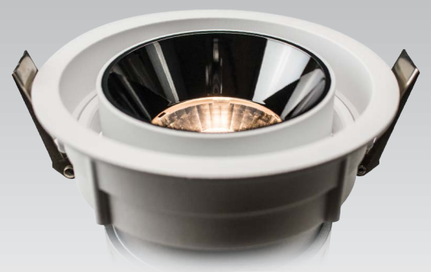

超窄邊框 | 黑光技術 | UGR<19 | 可擺角

The downlight is designed and built to suit as an excellent interior light for general areas.It adopts ultra high power LEDs as the light source for superior lighting efficiency. Use imported COB chip and quality reflector, the color is more uniform with higher lumen.The compact low-profile design with anti-glare lens and efficient visual comfort make it suitable for shops, hotels, restaurants, commercial space where effective solutions and brilliance are required for the illumination of merchandise, objects and materials.

JD-C371

- LED Power / 功率
  - 6W / 497 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

超窄邊框 | 黑光技術 | UGR<19 | 可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

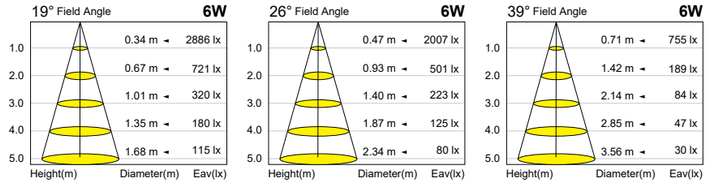

JD-C372

- LED Power / 功率
  - 12W / 997 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø90

超窄邊框 | 黑光技術 | UGR<19 | 可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

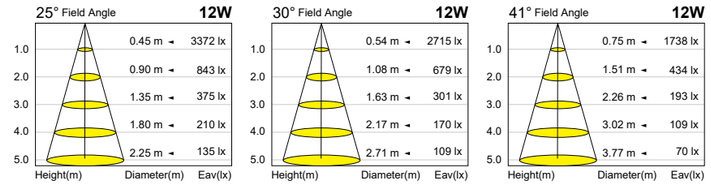

JD-C373

- LED Power / 功率

20W / 1576 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Narrow 窄角 | Medium 中角 | Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

White

- CutOut / 開孔尺寸

Ø105

超窄邊框 | 黑光技術 | UGR<19 | 可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

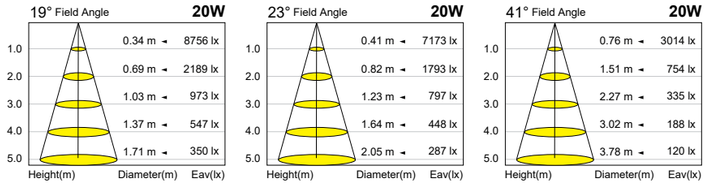

JD-C374

- LED Power / 功率

30W / 2608 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Narrow 窄角 | Medium 中角 | Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

White

- CutOut / 開孔尺寸

Ø120

超窄邊框 | 黑光技術 | UGR<19 | 可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

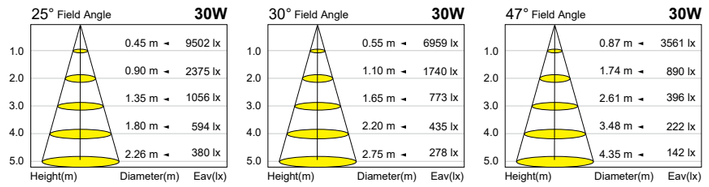

ULTRA-THIN 超薄型窄邊投射崁燈

NEW 超薄款 超窄邊框 可擺角

The LED Ultra-thin embedded projector lamp is an advanced lighting device with unique design features. Its ultra-thin heat sink, combined with a special optical lens, brings a fresh lighting experience. This lamp boasts an astonishingly slim heat sink, which effectively dissipates heat and, when combined with the special optical lens, ensures precise and uniform projection of LED light.

JD-C325

- LED Power / 功率
  - 8W / 675 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

超薄款 超窄邊框 可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

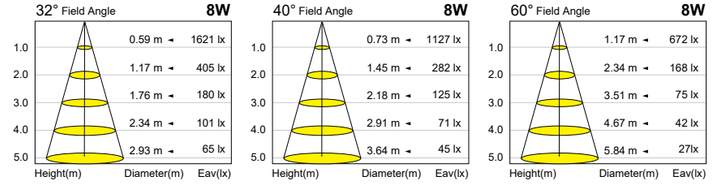

JD-C324

- LED Power / 功率
  - 5W / 525 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø55

超薄款 超窄邊框 可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

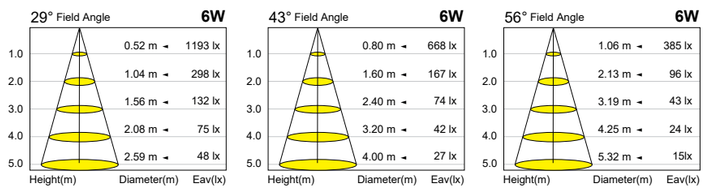

JD-C326

- LED Power / 功率
  - 10W / 938 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

超薄款 超窄邊框 可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

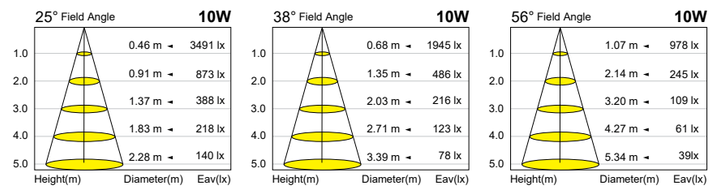

LED ADJUSTABLE DOWNLIGHT 可擺角崁燈系列

Spotlights are a versatile lighting fixture that feature a retractable lamp head. When the lamp head is retracted into the fixture, it can function as a directional spotlight, providing a straight beam of light. When the lamp head is extended, it can be freely adjusted up to 355 degrees to accommodate different lighting needs.
Recessed spotlights are commonly used for indoor lighting, such as in homes, offices, and shops. They can be installed in the ceiling, taking up minimal space while providing high-quality lighting.
Recessed spotlights are a practical and versatile lighting fixture that can provide high-quality lighting for various settings. Their retractable and adjustable lamp head design makes them more flexible and easier to adapt to different lighting needs.

JD-C350

- LED Power / 功率
  - 12W / 1104 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線



JD-C351

- LED Power / 功率
  - 15W / 1341 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø90

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C352

- LED Power / 功率
  - 20W / 1849 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø120

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



Spotlights are a versatile lighting fixture that feature a retractable lamp head. When the lamp head is retracted into the fixture, it can function as a directional spotlight, providing a straight beam of light. When the lamp head is extended, it can be freely adjusted up to 355 degrees to accommodate different lighting needs.
Recessed spotlights are commonly used for indoor lighting, such as in homes, offices, and shops. They can be installed in the ceiling, taking up minimal space while providing high-quality lighting.
Recessed spotlights are a practical and versatile lighting fixture that can provide high-quality lighting for various settings. Their retractable and adjustable lamp head design makes them more flexible and easier to adapt to different lighting needs.

JD-C354

- LED Power / 功率
  - 15W / 1387 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø100

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線







JD-C355

- LED Power / 功率
  - 20W / 2217 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø125

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線







JD-C356

- LED Power / 功率
  - 35W / 4212 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø150

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線







JD-C410

- LED Power / 功率
  - 15W / 974 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

超窄邊框 | 黑光技術 | UGR<19

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JD-C412

- LED Power / 功率
  - 20W / 1827 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø110

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C381

- LED Power / 功率
  - 20W / 1470 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

黑光技術 | UGR<19 | 可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JD-C321

- LED Power / 功率
  - 12W / 932 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø70

可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線







LED ADJUSTABLE DOWNLIGHT 可擺角崁燈系列

JD-C311

- LED Power / 功率
  - 8W / 792 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

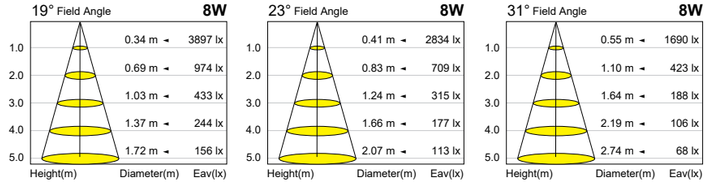

JD-C312

- LED Power / 功率
  - 8W / 792 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

超窄邊框 可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

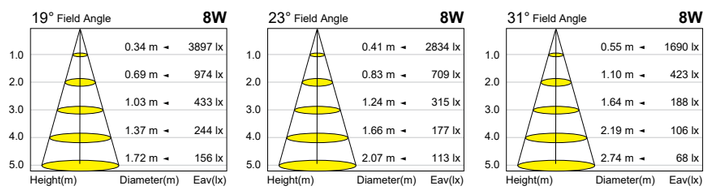

JD-C313

- LED Power / 功率
  - 8W / 697 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

超窄邊框 可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

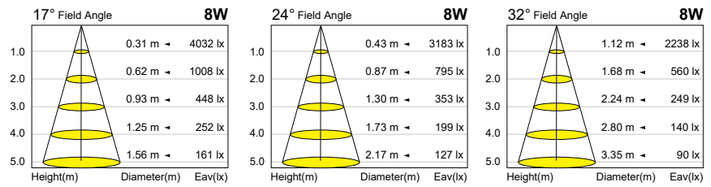

JD-C301

- LED Power / 功率
  - 15W / 1305 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

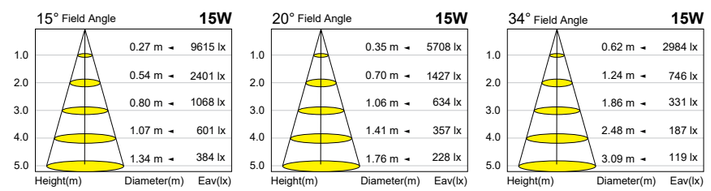

LED ADJUSTABLE DOWNLIGHT 可擺角崁燈系列

JD-C302

- LED Power / 功率
  - 15W / 1305 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

超窄邊框 可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

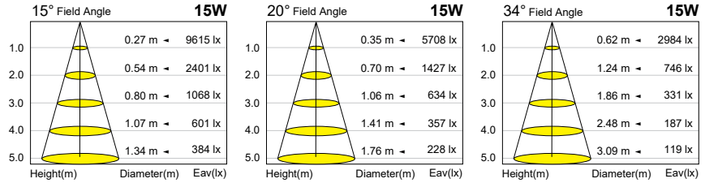

JD-C303

- LED Power / 功率
  - 15W / 1363 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

超窄邊框 可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線

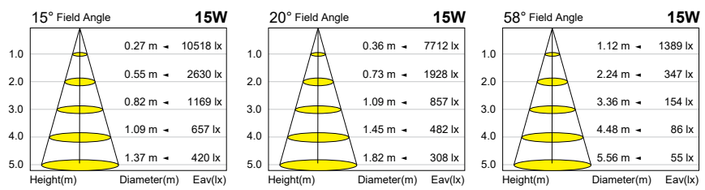

JD-206

- LED Power / 功率
  - 12W / 716 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線



JD-241

- LED Power / 功率
  - 3W / 250 Lm | 6W / 430 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø55

可擺角

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線



JD-200

- LED Power / 功率
  - 9W / 740 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 4000K Ra >80
- Color Options / 訂製色溫
  - 5700K Ra >80
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White | Black
- CutOut / 開孔尺寸
  - Ø90~95

可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-202

- LED Power / 功率
  - 12W / 960 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 4000K Ra >80
- Color Options / 訂製色溫
  - 5700K Ra >80
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White | Black
- CutOut / 開孔尺寸
  - Ø95

可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-203

- LED Power / 功率
  - 15W / 1280 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 4000K Ra >80
- Color Options / 訂製色溫
  - 5700K Ra >80
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White | Black
- CutOut / 開孔尺寸
  - Ø95

可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-204

- LED Power / 功率
  - 20W / 1900 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 4000K Ra >80
- Color Options / 訂製色溫
  - 5700K Ra >80
- Light Distribution / 投射角度
  - Narrow 窄角 | Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White | Black
- CutOut / 開孔尺寸
  - Ø95

可擺角 HIGH POWER

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





LED ADJUSTABLE DOWNLIGHT 可擺角崁燈系列

The New LED COB Reflector with sculptured angles helps to provide additional output for COB LEDs.
The specifically designed angles make the reflected light softer without glare.

- Body made from technopolymers. Reflector in vacuum-metallised polycarbonate with anti-scratch surface treatment
- Complete with optic housing and trim.
- Professional mirror optic with

JD-C421

- LED Power / 功率

8W / 685 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

White

- CutOut / 開孔尺寸

Ø80

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C422

- LED Power / 功率

12W / 917 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

White

- CutOut / 開孔尺寸

Ø100

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED ANTI-GLARE DOWNLIGHT 固定下照式崁燈系列

JD-C423

- LED Power / 功率
  - 15W / 1295 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø120

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C424

- LED Power / 功率
  - 20W / 1836 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø150

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C425

- LED Power / 功率
  - 30W / 2568 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø180

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C426

- LED Power / 功率
  - 35W / 3160 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø200

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED ANTI-GLARE DOWNLIGHT 固定下照式崁燈系列



The LED COB anti-glare embedded luminaire is a high-performance lighting device with a streamlined and minimalist design, featuring a curved frame that seamlessly integrates with the ceiling without appearing obtrusive. It is equipped with a Fresnel lens, which enhances light utilization, and paired with an optical anti-glare reflective structure, achieves a brighter, non-glaring and more uniform lighting effect.

Ø195 Ø175 Ø120 Ø90 Ø70

JD-C431

- LED Power / 功率
  - 8W / 865 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >80 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø70

UGR<19 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C432

- LED Power / 功率
  - 12W / 917 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >80 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø90

UGR<19 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED ANTI-GLARE DOWNLIGHT 固定下照式崁燈系列

JD-C433

- LED Power / 功率
  - 15W / 1295 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø120

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C434

- LED Power / 功率
  - 20W / 1836 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø175

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C435

- LED Power / 功率
  - 30W / 2568 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø195

UGR<19 | 黑光技術

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED ANTI-GLARE DOWNLIGHT 固定下照式崁燈系列


Chrome


White

Made of die-casting aluminium and designed in support of the heat dissipation function.
The lastest heat dissipation housing, with optimized heat dissipation structure, which felicitate the heat exchange quickly from aluminium alloy casting die housing to the air Made of optical polycarbonate with The special designed enable the fixture to constantly emit the smooth light, making the room look extraordinarily bright and comfortable up from the ceiling down to the floor.


Ø200


Ø165


Ø150


Ø110


Ø95

JD-C451

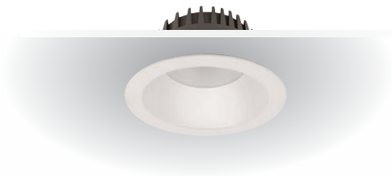

- LED Power / 功率
  - 12W / 716 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø95

UGR<19

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C452

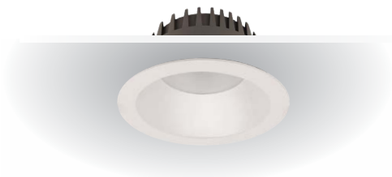

- LED Power / 功率
  - 15W / 1015 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø110

UGR<19

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED ANTI-GLARE DOWNLIGHT 固定下照式崁燈系列

JD-C453

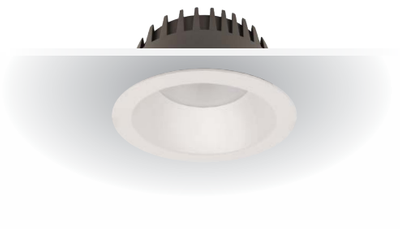

- LED Power / 功率
  - 20W / 1624 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø150

UGR<19

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C454

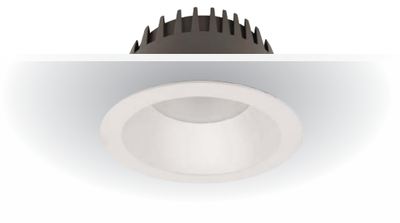

- LED Power / 功率
  - 30W / 2293 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø165

UGR<19

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C455

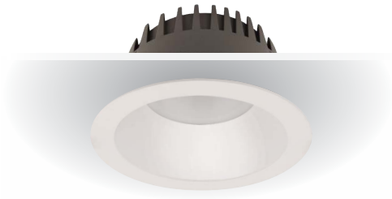

- LED Power / 功率
  - 35W / 2603 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø200

UGR<19

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED ANTI-GLARE DOWNLIGHT 固定下照式崁燈系列

IP65

Made of die-casting aluminum heatsink and designed in support of the heat dissipation function.
The latest heat dissipation housing, with optimized heat dissipation structure, which felicitate the heat exchange quickly from aluminum alloy die-casting housing to the air.
Housing and driver separated, with better heat dissipation, can effectively extend the lifespan for the light.

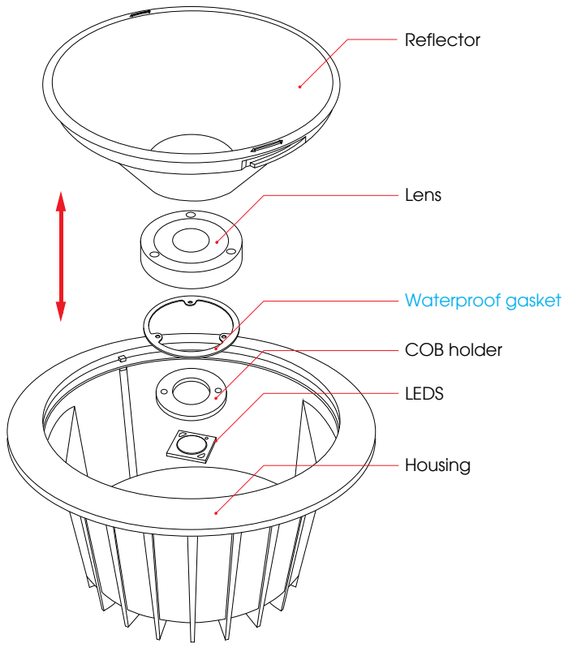

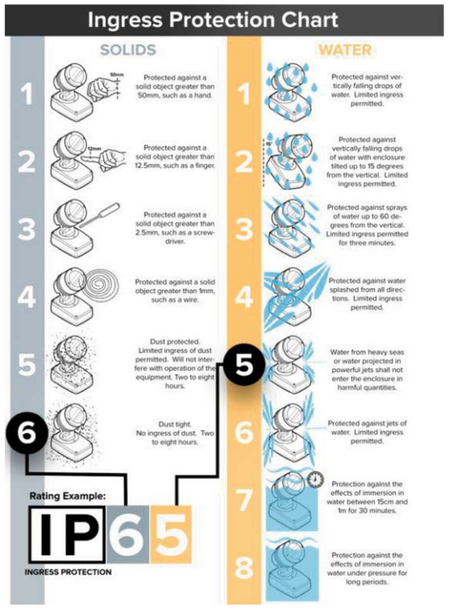

JD-C441

- LED Power / 功率
  - 12W / 715 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø90

IP65

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線



JD-C442

- LED Power / 功率
  - 20W / 1606 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø120

IP65

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線



LED ANTI-GLARE DOWNLIGHT 固定下照式崁燈系列

JD-C443

- LED Power / 功率
  - 30W / 2210 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø160~170

IP65

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-C445

- LED Power / 功率
  - 35W / 2744 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø195~210

IP65

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



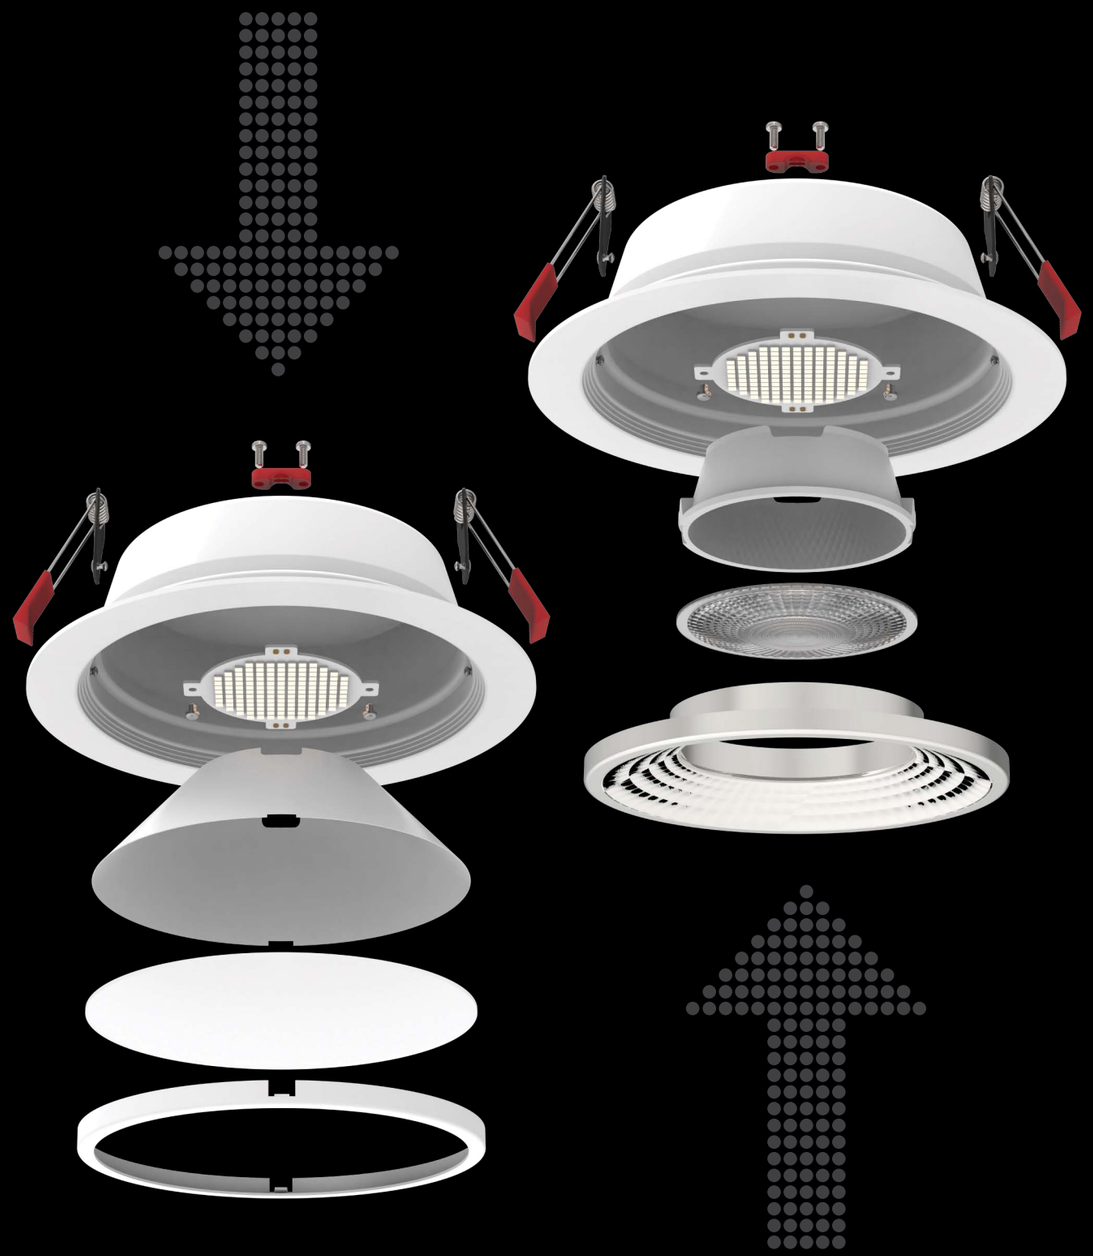

LED DIFFUSE DOWNLIGHT

LED anti-glare floodlight recessed downlight is a type of lighting fixture that uses LED as the light source. Its characteristic is that it can illuminate a wide area and cover a large area. This type of lighting fixture is mostly used for basic lighting to provide a basic and uniform brightness to the space. The special feature of this lighting fixture is that the luminous surface is recessed into the fixture to achieve an anti-glare effect. This design can reduce light reflection, minimize glare, and provide a more comfortable visual experience. In summary, the LED anti-glare floodlight recessed downlight is an efficient, energy-saving, environmentally friendly, and comfortable lighting device, which is very suitable for basic lighting in homes and commercial places.

JD-113

- LED Power / 功率
  - 9W / 540 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø75

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-114

- LED Power / 功率
  - 12W / 955 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø90

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-115

泛光型

- LED Power / 功率
  - 18W / 1361 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø120

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JD-116 / JD-C116

泛光型

透鏡型

- LED Power / 功率
  - 25W / 2343 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø150

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JD-117 / JD-C117

泛光型

透鏡型

- LED Power / 功率
  - 30W / 3009 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø180

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





JD-118 / JD-C118

泛光型

透鏡型

- LED Power / 功率
  - 35W / 3491 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø200

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線





LED DIFFUSE DOWNLIGHT 泛光崁燈系列

LED MINI DOWNLIGHT

Mini LED downlights are compact and bright lighting devices designed with small and exquisite design, providing a variety of options for color temperature and projection angle, making them very suitable for small spaces such as cabinets, jewelry display windows, and other areas. These lights not only provide high-brightness lighting effects but also create a warm and comfortable atmosphere.
Mini LED downlights are powerful and compact lighting devices, perfect for use in small spaces. They provide high-quality lighting for your exhibits while creating a comfortable and pleasant atmosphere, making your exhibits stand out.

JK-100

- LED Power / 功率
  - 2W / 74 Lm
- Color Temperature / 色溫
  - 3000K Ra >80
  - 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80
  - 4000K Ra >80
- Light Distribution / 投射角度
  - Narrow 窄角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø30

可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JK-101

- LED Power / 功率
  - 3W / 170 Lm
- Color Temperature / 色溫
  - 3000K Ra >80
  - 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80
  - 4000K Ra >80
- Light Distribution / 投射角度
  - Narrow 窄角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø40

可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED MINI DOWNLIGHT 迷你櫥櫃崁燈系列

JK-102

- LED Power / 功率
  - 5W / 249 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø50

可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JK-103

- LED Power / 功率
  - 3W / 170 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Wide Flood 泛光
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø58

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JK-104

- LED Power / 功率
  - 3W / 170 Lm
- Color Temperature / 色溫
  - 3000K Ra >80 | 5700K Ra >80
- Color Options / 訂製色溫
  - 2700K Ra >80 | 4000K Ra >80
- Light Distribution / 投射角度
  - Narrow 窄角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø34

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JK-105

- LED Power / 功率
  - 5W / 303 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90
- Light Distribution / 投射角度
  - Narrow 窄角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - White
- CutOut / 開孔尺寸
  - Ø45

可擺角

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



MAGICAL LED MODULE 50

The customizable LED 50 MODULE light source is an innovative lighting technology consisting of individual LED modules that can be controlled independently and combined freely to create various shapes and sizes of lighting effects.

This light source can be applied in many lighting fields, such as architectural lighting, commercial lighting, and landscape lighting, with the advantages of high efficiency, low energy consumption, long lifespan, and strong reliability. Its high-quality light can be focused through optical glass lenses to achieve high illuminance and uniform illumination.

Additionally, the LED 50 MODULE light source can be equipped with an intelligent dimming control system to achieve flexible adjustment of lighting scenes and energy-saving effects. In the future, the customizable LED 50 MODULE light source will play an even more important role in the lighting field and become an indispensable lighting device.

LED MODULE 50 50 模組崁燈系列

50 MODULE
COB 15W

50 MODULE
COB 10W/12W

50 MODULE

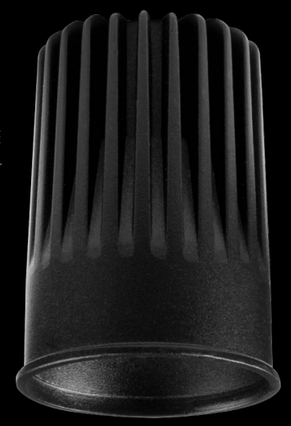

LED

2700K	Ra >90
3000K	Ra >90
3500K	Ra >90
4000K	Ra >90
2700K~6000K	Ra >90

LED COB

Reflector



● Narrow 窄角



● Medium 中角



● Flood 寬角

COMMERCIAL SPACE

HOME

Application

50 MODULE
下裝式50崁燈

50 MODULE
上裝式50崁燈

50 MODULE
無邊框埋入式50崁燈

LED MODULE 50 50 模組崁燈系列

可適用 MR16杯燈系列

可適用 50模組系列

可適用 MR16杯燈/50模組系列 相關參數請詳閱光源頁面

A

可擺角

A

可擺角

A

可擺角

B

可擺角

B

可擺角

B

可擺角

C

可擺角

C

可擺角

C

可擺角

D

可擺角

D

可擺角

D

可擺角

JM-C001

- SIZE / 外觀尺寸

Ø80X55 mm

- CutOut / 開孔尺寸

Ø75

JM-C002

- SIZE / 外觀尺寸

Ø80X55 mm

- CutOut / 開孔尺寸

Ø75

JM-C003

- SIZE / 外觀尺寸

Ø80X35 mm

- CutOut / 開孔尺寸

Ø75

無邊框

可擺角

JM-C008

- SIZE / 外觀尺寸

Ø95X35 mm

- CutOut / 開孔尺寸

Ø85

無邊框

可擺角

JM-C009

- SIZE / 外觀尺寸

Ø100X50 mm

- CutOut / 開孔尺寸

Ø90

無邊框

可擺角

JM-C010

- SIZE / 外觀尺寸

105X105X45 mm

- CutOut / 開孔尺寸

95X95mm

無邊框

可擺角

JM-C004

- SIZE / 外觀尺寸

Ø83X42 mm

- CutOut / 開孔尺寸

Ø85

JM-C011

- SIZE / 外觀尺寸

205X105X45 mm

- CutOut / 開孔尺寸

195X95mm

LED MODULE 50 50 模組崁燈系列

可適用 MR16杯燈系列

可適用 50模組系列

可適用 MR16杯燈/50模組系列 相關參數請詳閱光源頁面

可擺角

JD-500
- SIZE / 外觀尺寸
- Ø93X45 mm
- CutOut / 開孔尺寸
- Ø85

可加購防眩環 Ø50 X H23mm

可擺角

JD-501
- SIZE / 外觀尺寸
- Ø90X23 mm
- CutOut / 開孔尺寸
- Ø70

可加購防眩環 Ø50 X H23mm

可擺角

JD-504
- SIZE / 外觀尺寸
- Ø85X28 mm
- CutOut / 開孔尺寸
- Ø80

可擺角

JD-521
- SIZE / 外觀尺寸
- Ø88X50 mm
- CutOut / 開孔尺寸
- Ø70

可擺角

JD-517A01
- SIZE / 外觀尺寸
- Ø85X18 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-517A03
- SIZE / 外觀尺寸
- Ø85X18 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-519
- SIZE / 外觀尺寸 Black ●
- Ø85X45 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-503
- SIZE / 外觀尺寸 Black ●
- Ø85X20 mm
- CutOut / 開孔尺寸
- Ø75

JD-520
- SIZE / 外觀尺寸 Black ●
- Ø85X30 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-522
- SIZE / 外觀尺寸 Black ●
- Ø93X50 mm
- CutOut / 開孔尺寸
- Ø85

可擺角

JD-517B01
- SIZE / 外觀尺寸 Black ●
- Ø85X25 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-517B03
- SIZE / 外觀尺寸 Black ●
- Ø85X30 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-502
- SIZE / 外觀尺寸 Black ●
- Ø95X33 mm
- CutOut / 開孔尺寸
- Ø80

可加購防眩環 Ø50 X H23mm

可擺角

JD-513
- SIZE / 外觀尺寸 Black ●
- Ø86X40 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-506
- SIZE / 外觀尺寸 Black ●
- Ø110X30 mm
- CutOut / 開孔尺寸
- Ø95

可加購防眩環 Ø50 X H23mm

可擺角

JD-523
- SIZE / 外觀尺寸 Black ●
- Ø90X25 mm
- CutOut / 開孔尺寸
- Ø82

可加購防眩環 Ø50 X H23mm

可擺角

JD-517C01
- SIZE / 外觀尺寸 Black ●
- Ø80X30 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-517C03
- SIZE / 外觀尺寸 Black ●
- Ø80X30 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-508
- SIZE / 外觀尺寸 Black ●
- Ø102X37 mm
- CutOut / 開孔尺寸
- Ø95

可擺角

JD-514
- SIZE / 外觀尺寸 Black ●
- Ø86X40 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-507
- SIZE / 外觀尺寸 Black ●
- Ø110X28 mm
- CutOut / 開孔尺寸
- Ø95

可加購防眩環 Ø50 X H23mm

可擺角

JD-524
- SIZE / 外觀尺寸 Black ●
- Ø100X40 mm
- CutOut / 開孔尺寸
- Ø90

可加購防眩環 Ø50 X H23mm

可擺角

JD-517D01
- SIZE / 外觀尺寸 Black ●
- Ø80X30 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

可擺角

JD-517D03
- SIZE / 外觀尺寸 Black ●
- Ø80X30 mm
- CutOut / 開孔尺寸
- Ø75

可加購防眩環 Ø50 X H23mm

LED MODULE 50 50 模組崁燈系列

COMPOSABLE LED RECESSED SPORT LIGHT

LED RECESSED SPORT LIGHT is characterized by its various sizes with options of framed and frameless design. It offers superior lighting for sports venues with high efficiency, low energy consumption, long lifespan, and strong reliability. The high-quality light can be focused through optical glass lenses to achieve high illuminance and uniform illumination, creating a comfortable and safe environment for sports enthusiasts.
The customizable LED RECESSED SPORT LIGHT can be equipped with an intelligent dimming control system to achieve flexible adjustment of lighting scenes and energy-saving effects. Its easy installation and maintenance make it a great choice for sports lighting applications.

LED RECESSED SPORT LIGHT 嵌入式盒燈系列

LED RECESSED SPORT LIGHT

The LED RECESSED SPORT LIGHT is a cutting-edge lighting solution that offers boundless creativity and freedom. Its most striking feature is the multifunctionality of the front frame, allowing you to easily create various combinations. The borderless design of the frame further expands the possibilities for configuration. This means that the LED RECESSED SPORT LIGHT can seamlessly adapt to different settings and requirements, whether it's for creating soft ambient lighting or intense localized illumination.

■ 可自由搭配前框, 改變外型與功能

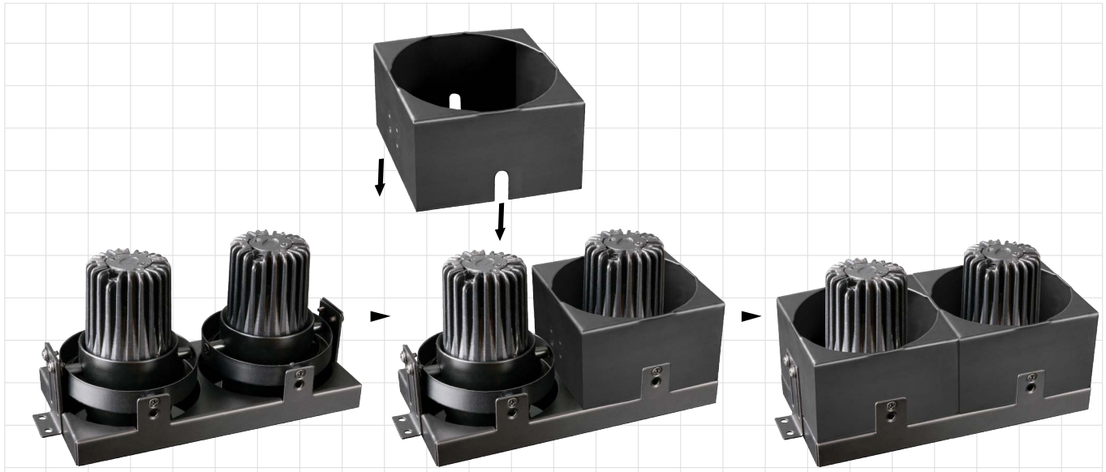

■ 將光源安裝完成 ■ 將無邊框專用後蓋卡入 ■ 完成安裝

■ MR16防眩前框 ■ MR16 C型環前框 ■ AR70防眩前框 ■ AR70 後卡式前框 ■ AR111防眩前框 ■ AR111 C型環前框

可適用 MR16杯燈系列

可適用 50模組12W系列

超薄款 ULTRATHIN 5085無邊框通用系列 Anti-glare Ring

JR-C511 JR-C512 JR-C513

超薄款 ULTRATHIN 5085無邊框防眩系列 Anti-glare Ring

JR-C521 JR-C522 JR-C523

超薄款 ULTRATHIN 5095有邊框通用系列 Standard Specification

JR-C531 JR-C532 JR-C533

超薄款 ULTRATHIN 5095有邊框防眩系列 Standard Specification

JR-C541 JR-C542 JR-C543

無邊框

JR-C511
- CutOut / 開孔尺寸
- 85 x 85mm



JR-C512
- CutOut / 開孔尺寸
- 85 x 171mm



JR-C513
- CutOut / 開孔尺寸
- 85 x 256mm



JR-C521
- CutOut / 開孔尺寸
- 85 x 85mm



JR-C522
- CutOut / 開孔尺寸
- 85 x 171mm



JR-C523
- CutOut / 開孔尺寸
- 85 x 256mm



有邊框

JR-C531
- CutOut / 開孔尺寸
- 95 x 95mm



JR-C532
- CutOut / 開孔尺寸
- 95 x 175mm



JR-C533
- CutOut / 開孔尺寸
- 95 x 265mm



JR-C541
- CutOut / 開孔尺寸
- 95 x 95mm



JR-C542
- CutOut / 開孔尺寸
- 95 x 175mm



JR-C543
- CutOut / 開孔尺寸
- 95 x 265mm



LED RECESSED SPORT LIGHT 嵌入式盒燈系列

可適用 MR16杯燈系列

可適用 50模組12W系列

50100 無邊框通用系列 Anti-glare Ring

超薄款 ULTRATHIN

JR-C611 JR-C612 JR-C613

50105 無邊框防眩系列 Anti-glare Ring

超薄款 ULTRATHIN

JR-C621 JR-C622 JR-C623

50100 有邊框通用系列 Standard Specification

超薄款 ULTRATHIN

JR-C631 JR-C632 JR-C633

50105 有邊框防眩系列 Standard Specification

超薄款 ULTRATHIN

JR-C641 JR-C642 JR-C643

無邊框

JR-C611
- CutOut / 開孔尺寸
- 100 x 100mm



JR-C612
- CutOut / 開孔尺寸
- 100 x 200mm



JR-C613
- CutOut / 開孔尺寸
- 100 x 300mm



JR-C621
- CutOut / 開孔尺寸
- 100 x 100mm



JR-C622
- CutOut / 開孔尺寸
- 100 x 200mm



JR-C623
- CutOut / 開孔尺寸
- 100 x 300mm



有邊框

JR-C631
- CutOut / 開孔尺寸
- 110 x 110mm



JR-C632
- CutOut / 開孔尺寸
- 110 x 210mm



JR-C633
- CutOut / 開孔尺寸
- 110 x 310mm



JR-C641
- CutOut / 開孔尺寸
- 110 x 110mm



JR-C642
- CutOut / 開孔尺寸
- 110 x 210mm



JR-C643
- CutOut / 開孔尺寸
- 110 x 310mm



LED RECESSED SPORT LIGHT 嵌入式盒燈系列

10W超薄模組　15W模組　20W模組

超薄款 ULTRATHIN 70115 無邊框通用系列 Anti-glare Ring

JR-C711　JR-C712　JR-C713

超薄款 ULTRATHIN 70115 無邊框防眩系列 Anti-glare Ring

JR-C721　JR-C722　JR-C723

超薄款 ULTRATHIN 70125 有邊框通用系列 Standard Specification

JR-C731　JR-C732　JR-C733

超薄款 ULTRATHIN 70125 有邊框防眩系列 Standard Specification

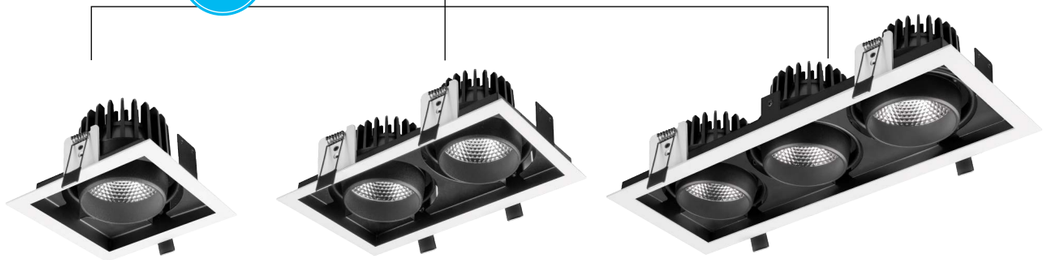

JR-C741　JR-C742　JR-C743

無邊框

JR-C711
- CutOut / 開孔尺寸: 115 x 115mm



JR-C712
- CutOut / 開孔尺寸: 115 x 220mm



JR-C713
- CutOut / 開孔尺寸: 115 x 320mm



JR-C721
- CutOut / 開孔尺寸: 115 x 115mm



JR-C722
- CutOut / 開孔尺寸: 115 x 220mm



JR-C723
- CutOut / 開孔尺寸: 115 x 320mm



有邊框

JR-C731
- CutOut / 開孔尺寸: 125 x 125mm



JR-C732
- CutOut / 開孔尺寸: 125 x 230mm



JR-C733
- CutOut / 開孔尺寸: 125 x 330mm



JR-C741
- CutOut / 開孔尺寸: 125 x 125mm



JR-C742
- CutOut / 開孔尺寸: 125 x 230mm



JR-C743
- CutOut / 開孔尺寸: 125 x 330mm



LED RECESSED SPORT LIGHT 嵌入式盒燈系列

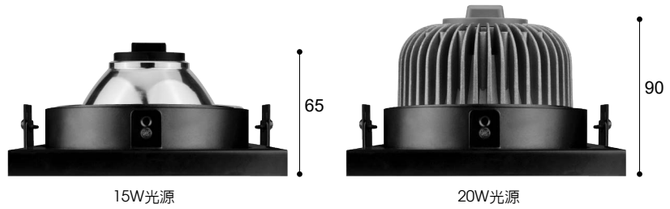

111160 無邊框通用系列 Anti-glare Ring

超薄款 ULTRATHIN

JR-C811 JR-C812 JR-C813

111160 無邊框防眩系列 Anti-glare Ring

超薄款 ULTRATHIN

JR-C821 JR-C822 JR-C823

111170 有邊框通用系列 Standard Specification

超薄款 ULTRATHIN

JR-C831 JR-C832 JR-C833

111170 有邊框防眩系列 Standard Specification

超薄款 ULTRATHIN

JR-C841 JR-C842 JR-C843

無邊框

JR-C811
- CutOut / 開孔尺寸 160 x 160mm



JR-C812
- CutOut / 開孔尺寸 160 x 310mm



JR-C813
- CutOut / 開孔尺寸 160 x 460mm



JR-C821
- CutOut / 開孔尺寸 160 x 160mm



JR-C822
- CutOut / 開孔尺寸 160 x 310mm



JR-C823
- CutOut / 開孔尺寸 160 x 460mm



有邊框

JR-C831
- CutOut / 開孔尺寸 170 x 170mm



JR-C832
- CutOut / 開孔尺寸 170 x 320mm

JR-C833
- CutOut / 開孔尺寸 170 x 470mm



JR-C841
- CutOut / 開孔尺寸 170 x 170mm



JR-C842
- CutOut / 開孔尺寸 170 x 320mm



JR-C843
- CutOut / 開孔尺寸 170 x 470mm



LED RECESSED SPORT LIGHT 嵌入式盒燈系列

STABLE LED CEILING DOWNLIGHT

LED CEILING DOWNLIGHT is a type of energy-efficient lighting fixture that is commonly used in indoor environments such as homes, offices, and retail spaces. It is designed to be installed directly into the ceiling, providing a sleek and modern appearance while also providing excellent illumination. This type of lighting fixture is often used to replace traditional incandescent or fluorescent ceiling lights due to its long lifespan, low energy consumption, and eco-friendliness. LED CEILING DOWNLIGHTS are available in a variety of styles and sizes, making them suitable for different room sizes and interior design styles. In addition, they are compatible with dimmer switches, allowing users to adjust the lighting intensity to their desired level.
With its numerous advantages, LED CEILING DOWNLIGHT is becoming increasingly popular in the lighting industry and is expected to have a bright future.

LED WATERPROOF CYLINDER LIGHT 防水筒燈系列

IP65

The LED WATERPROOF CYLINDER LIGHT is a robust and durable lighting solution with a prominent IP65 waterproof rating. Its design integrates functionality and aesthetics, suitable for various outdoor applications. The IP65 rating ensures outdoor waterproofing and protection, maintaining reliable performance even in harsh weather conditions. The lighting fixture provides efficient illumination while preserving waterproof integrity, making it an ideal choice for pathways, gardens, outdoor spaces, and more. The practical design and waterproof features enhance visibility and strength in outdoor environments, offering a dependable option for safe and enjoyable lighting experiences.

JC-C641

- LED Power / 功率
  - 10W / 963 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

IP65

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

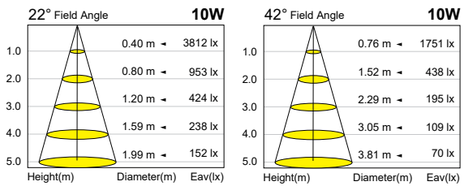

JC-C642

- LED Power / 功率
  - 15W / 1199 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

IP65

- Accessory / 配件



- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

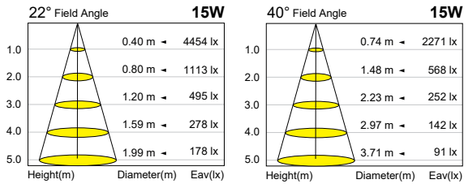

JC-C643

- LED Power / 功率
  - 20W / 1757 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

IP65

- Accessory / 配件



- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線

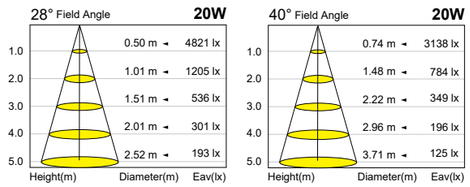

JC-C644

- LED Power / 功率
  - 30W / 2376 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

IP65

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線





JC-C645

- LED Power / 功率
  - 35W / 2821 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - Black | White

訂製品 Made to order

IP65

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線





JC-C646

- LED Power / 功率
  - 35W / 2868 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - Black | White

訂製品 Made to order

IP65

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線





JC-C647

- LED Power / 功率
  - 50W / 3860 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90
- Light Distribution / 投射角度
  - Medium 中角 | Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - DALI | 0-10V
- Color (Housing) / 機構外觀顏色
  - Black | White

訂製品 Made to order

IP65

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattern / 配光曲線





LED WATERPROOF CYLINDER LIGHT 防水筒燈系列

加長型防眩結構

蜂窩型防眩網

The square flush-mounted anti-glare luminaire is an excellent lighting fixture known for its ability to effectively prevent glare issues while offering high customizability. The design of this fixture ingeniously addresses glare problems, ensuring uniform and comfortable illumination. Furthermore, it provides a significant level of customization by allowing flexible selection of LED light sources with different power levels to achieve precise lighting control to suit various needs and settings.

JC-C651

- LED Power / 功率

MR16	10W 50模組

- 詳細規格請參考光源模組頁面
- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black

- Accessory / 配件

- Dimensions / 尺寸線圖



JC-C652

- LED Power / 功率

MR16	10W 50模組

- 詳細規格請參考光源模組頁面
- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black

- Accessory / 配件



- Dimensions / 尺寸線圖



JC-C653

- LED Power / 功率

AR70 模組 X 1

- 詳細規格請參考光源模組頁面
- Color Temperature / 色溫

3000K Ra >90	3500K Ra >90	4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90	5000K Ra >80	Tuneable White

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC	DALI	0-10V	Tuneable White

- Color (Housing) / 機構外觀顏色

Black

- Accessory / 配件



- Dimensions / 尺寸線圖



JC-C654

- LED Power / 功率

AR70 模組 X 2

- 詳細規格請參考光源模組頁面
- Color Temperature / 色溫

3000K Ra >90	3500K Ra >90	4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90	5000K Ra >80	Tuneable White

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC	DALI	0-10V	Tuneable White

- Color (Housing) / 機構外觀顏色

Black

- Accessory / 配件



- Dimensions / 尺寸線圖



LED CYLINDER LIGHT 明裝筒燈系列

JC-C611

- LED Power / 功率
  - 10W / 672 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C612

- LED Power / 功率
  - 12W / 1023 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C613

- LED Power / 功率
  - 15W / 1307 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Medium 中角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C614

- LED Power / 功率
  - 20W / 2058 Lm
- Color Temperature / 色溫
  - 3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90
- Color Options / 訂製色溫
  - 2700K Ra >90 | 5000K Ra >90 | Tuneable White
- Light Distribution / 投射角度
  - Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Control / 控制
  - TRAIC | DALI | 0-10V | Tuneable White
- Color (Housing) / 機構外觀顏色
  - Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



LED CYLINDER LIGHT 明裝筒燈系列

JC-C621

- LED Power / 功率

8W / 750 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C622

- LED Power / 功率

12W / 1078 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C623

- LED Power / 功率

20W / 2071 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C624

- LED Power / 功率

30W / 2767 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C625

- LED Power / 功率

10W / 697 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C626

- LED Power / 功率

20W / 1076 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C627

- LED Power / 功率

30W / 1781 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90 | Tuneable White

- Light Distribution / 投射角度

Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線



JC-C632

- LED Power / 功率

10W / 672 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Narrow 窄角 | Medium 中角 | Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

軌道連接座

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線







JC-C633

- LED Power / 功率

15W / 1028 Lm

- Color Temperature / 色溫

3000K Ra >90 | 3500K Ra >90 | 4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Narrow 窄角 | Medium 中角 | Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC | DALI | 0-10V | Tuneable White

- Color (Housing) / 機構外觀顏色

Black | White

- Accessory / 配件

軌道連接座

- Dimensions / 尺寸線圖



- Light Pattem / 配光曲線







LED CYLINDER LIGHT 明裝筒燈系列

LINEAR ILLUNATION

LED DOWNLIGHT is a type of recessed ceiling light that has become increasingly popular in recent years due to its energy efficiency and long lifespan. It is widely used in commercial and residential settings, such as hotels, restaurants, homes, and offices. In addition to providing excellent lighting, it also creates a modern and stylish atmosphere.

As technology continues to advance, the future of LED DOWNLIGHT is promising. With the development of smart lighting systems, LED DOWNLIGHT can be controlled remotely and even interact with other devices, providing a more convenient and personalized lighting experience. Furthermore, the use of sustainable materials in the manufacturing process will enhance its environmental performance. As such, LED DOWNLIGHT will play an important role in the future of energy-efficient and sustainable lighting.

LED LINEAR LIGHT 線性照明系列

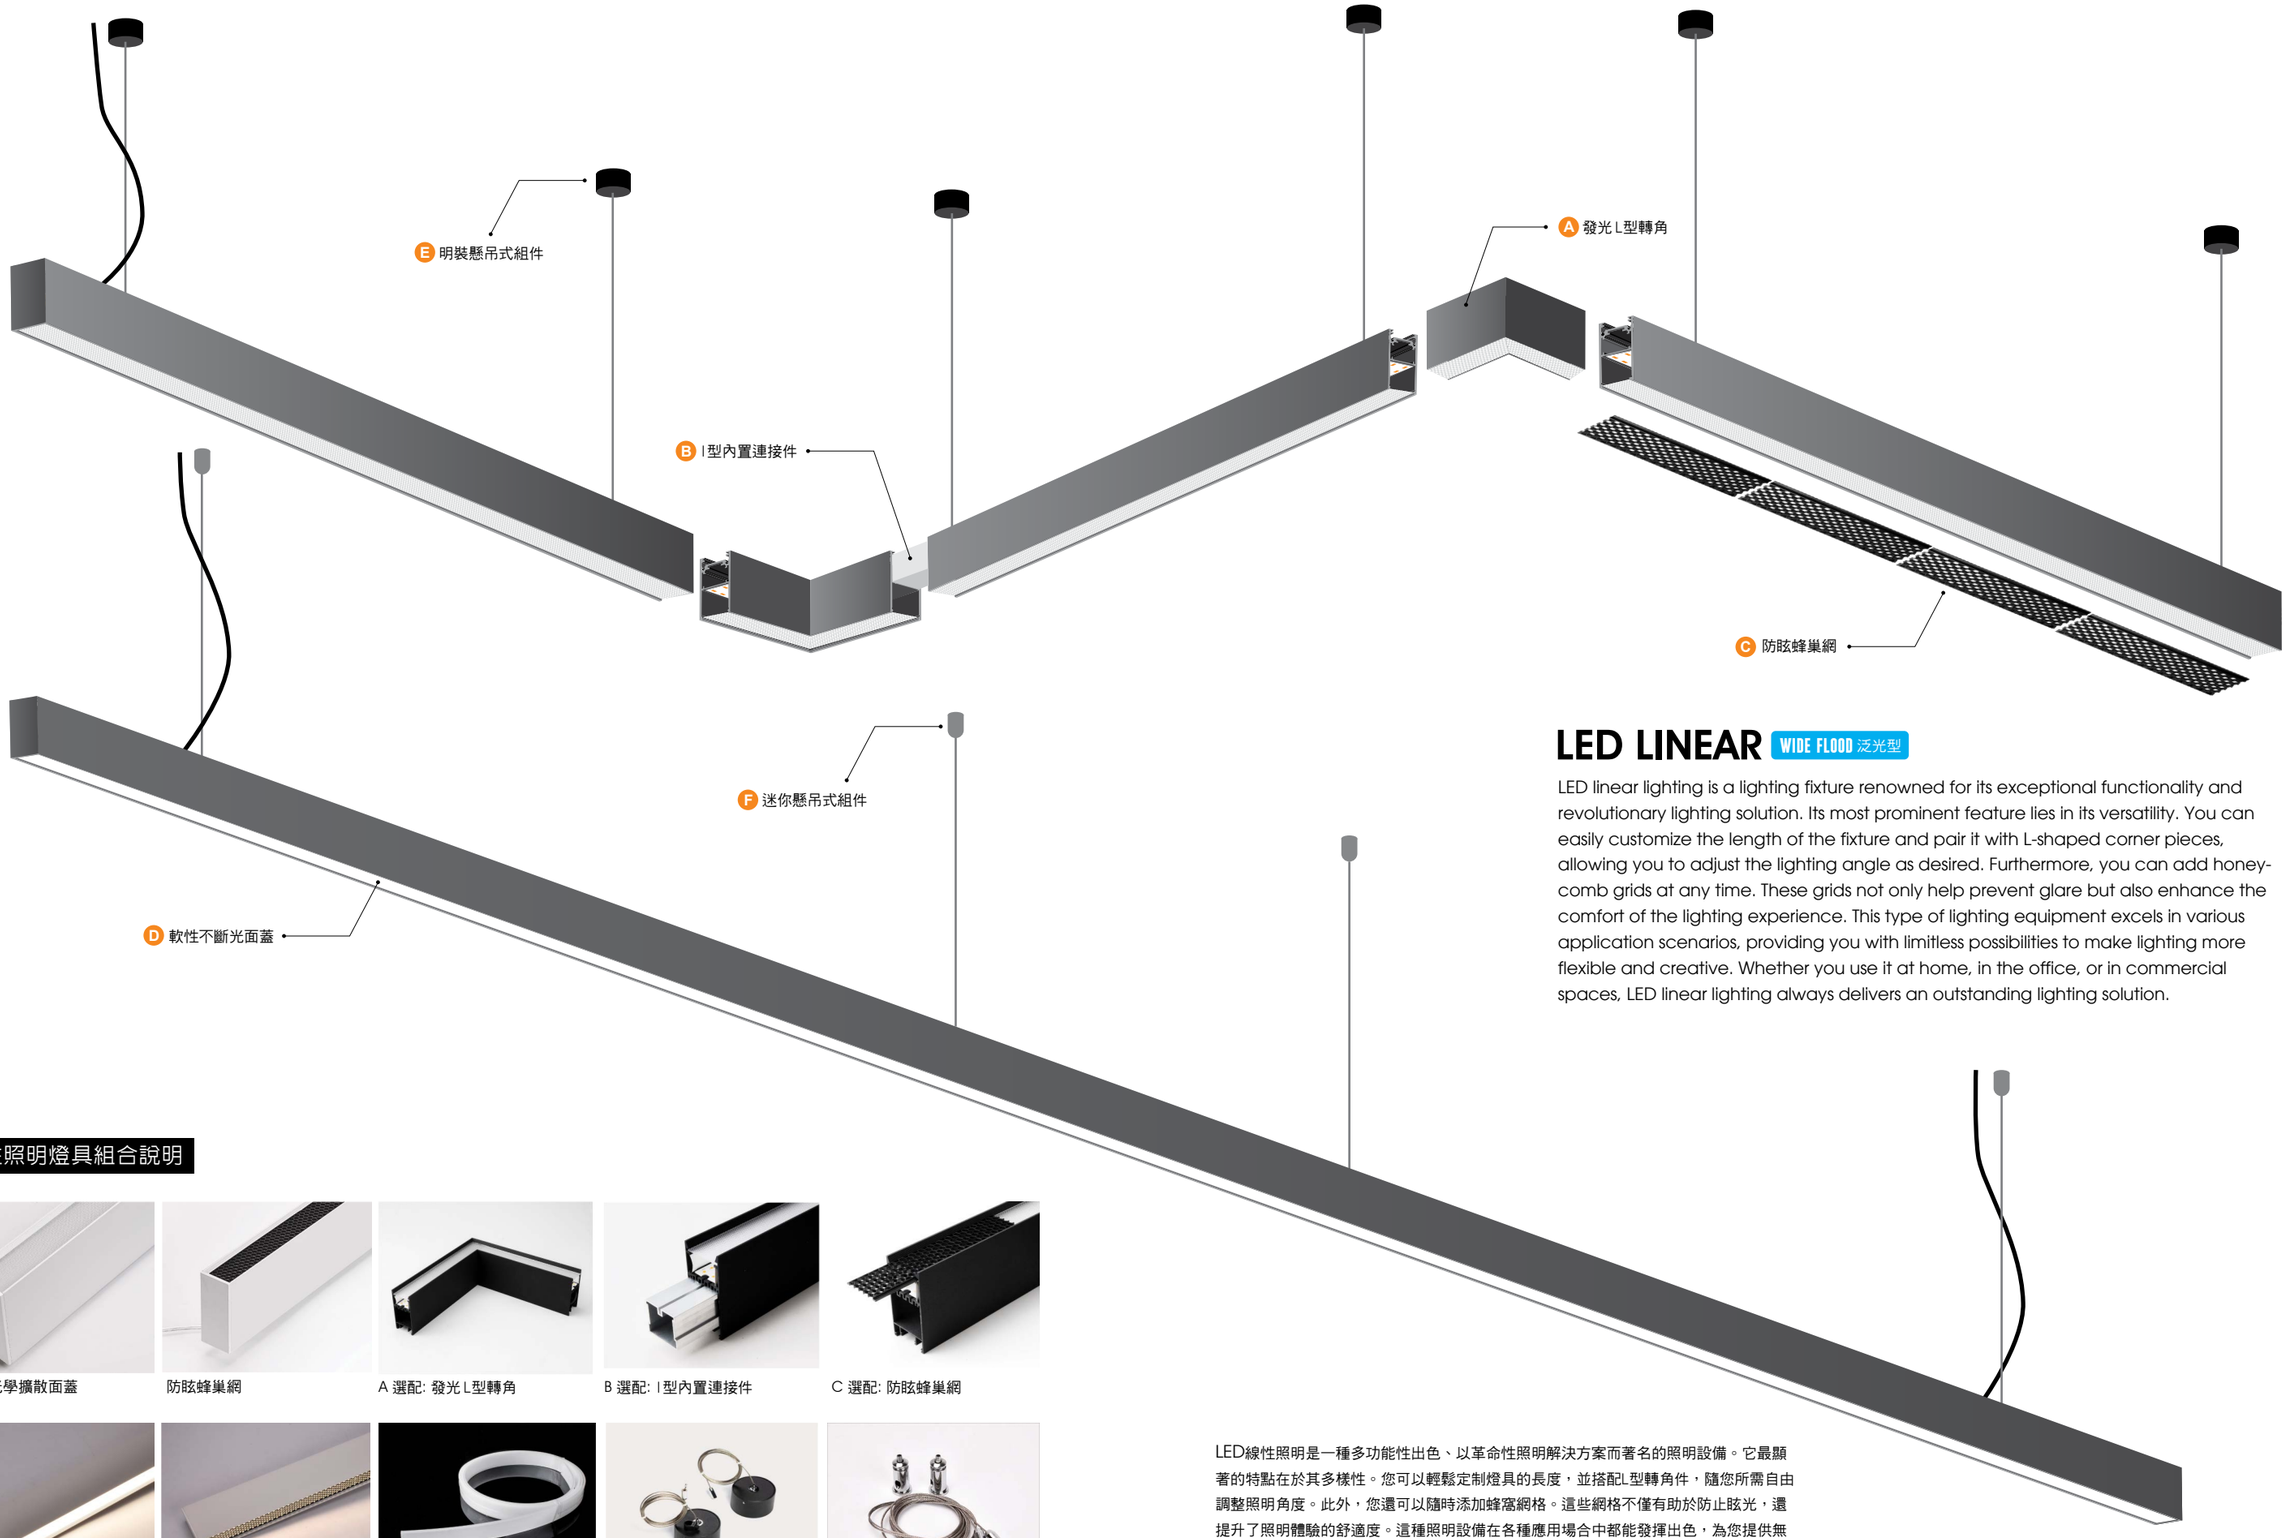

LED LINEAR WIDE FLOOD 泛光型

LED linear lighting is a lighting fixture renowned for its exceptional functionality and revolutionary lighting solution. Its most prominent feature lies in its versatility. You can easily customize the length of the fixture and pair it with L-shaped corner pieces, allowing you to adjust the lighting angle as desired. Furthermore, you can add honey-comb grids at any time. These grids not only help prevent glare but also enhance the comfort of the lighting experience. This type of lighting equipment excels in various application scenarios, providing you with limitless possibilities to make lighting more flexible and creative. Whether you use it at home, in the office, or in commercial spaces, LED linear lighting always delivers an outstanding lighting solution.

線性照明燈具組合說明


菱格型光學擴散面蓋

防眩蜂巢網

A 選配: 發光L型轉角

B 選配: I型內置連接件

C 選配: 防眩蜂巢網


菱格型光學擴散光效


防眩蜂巢網光效


D 選配: 軟性不斷光面蓋


E 選配: 軟性不斷光面蓋


F 選配: 軟性不斷光面蓋

LED線性照明是一種多功能性出色、以革命性照明解決方案而著名的照明設備。它最顯著的特點在於其多樣性。您可以輕鬆定制燈具的長度，並搭配L型轉角件，隨您所需自由調整照明角度。此外，您還可以隨時添加蜂窩網格。這些網格不僅有助於防止眩光，還提升了照明體驗的舒適度。這種照明設備在各種應用場合中都能發揮出色，為您提供無限可能性，讓照明更加靈活和具有創造性。無論您是在家中、辦公室還是商業空間中使用，LED線性照明都能為您提供卓越的照明解決方案。

LED LINEAR LIGHT 線性照明系列

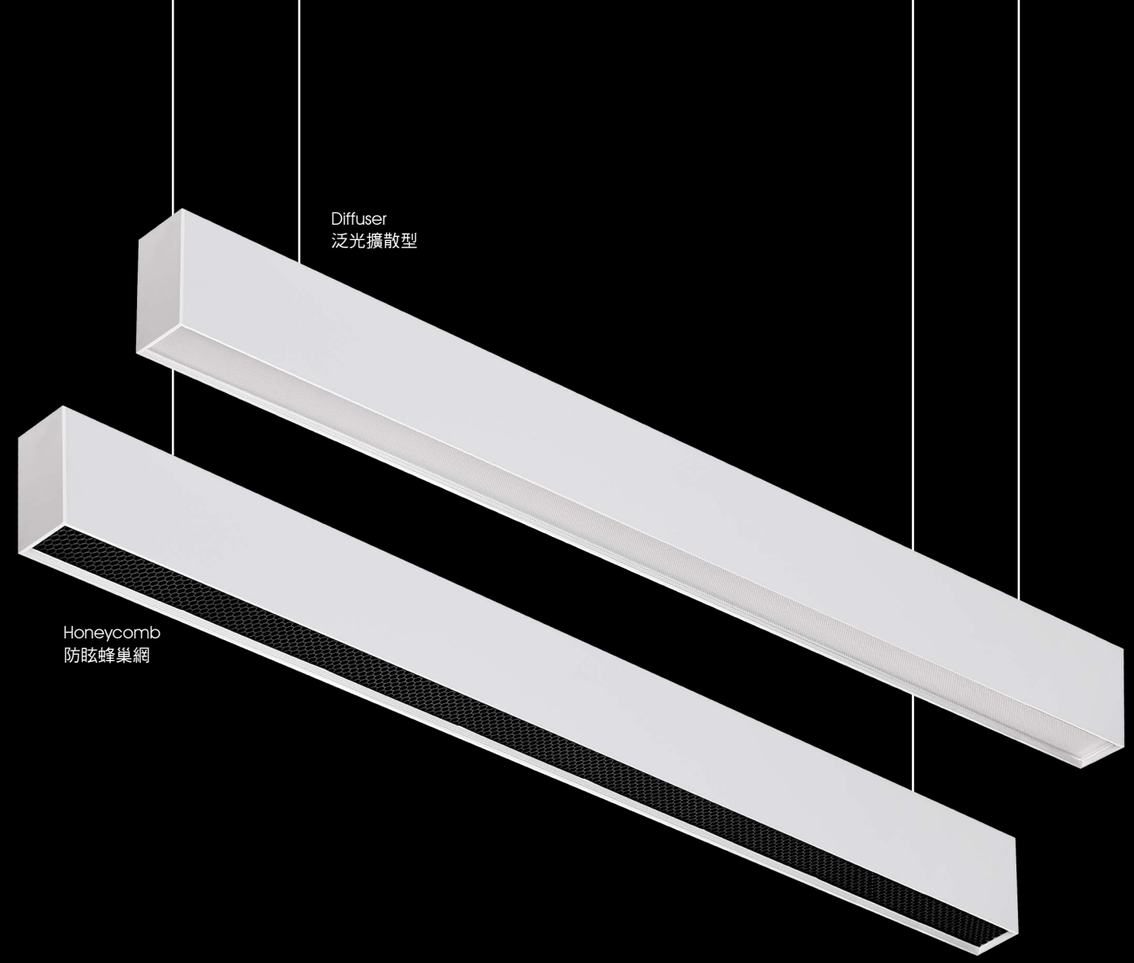

LED LINEAR WIDE FLOOD 泛光型

The LED linear fixture is a revolutionary lighting solution known for its exceptional versatility. Its most prominent feature is its multifunctionality. You can easily customize the length of the fixture and pair it with L-shaped corner pieces, allowing you to freely adjust the lighting angle as desired. Furthermore, you have the flexibility to add honeycomb grids at any time. These grids not only help prevent glare but also enhance the comfort of the lighting experience.

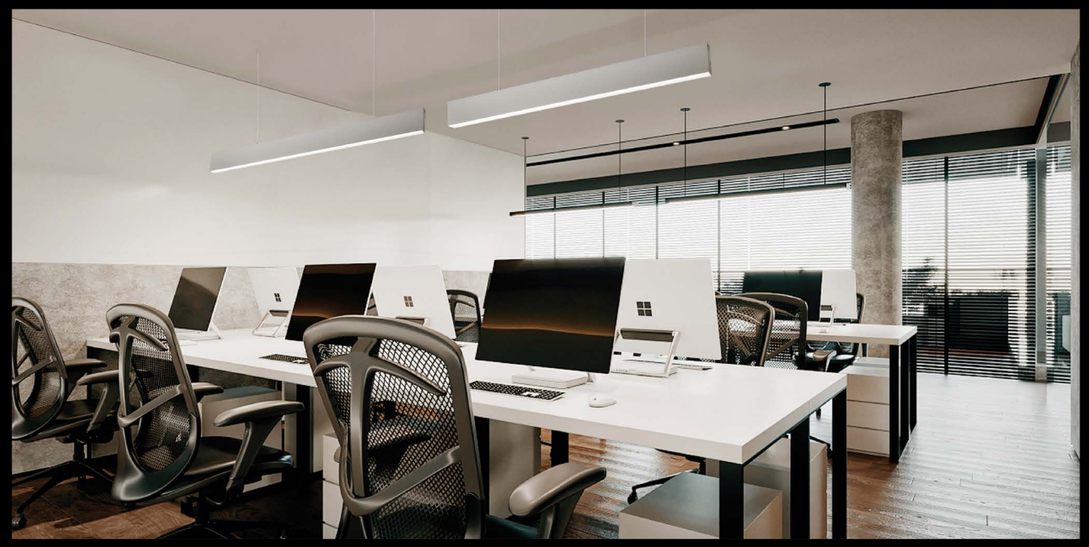


菱格型光學擴散面蓋


防眩蜂巢網


A 選配: 發光 L 型轉角


B 選配: I 型內置連接件


菱格型光學擴散光效


防眩蜂巢網光效


C 選配: 防眩蜂巢網


D 選配: 軟性不斷光面蓋

JL-150

- LED Power / 功率

36W / 3456 Lm

訂製品 Made to order

- Color Temperature / 色溫

3000K Ra >90 | 4000K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Wide Flood 泛光

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JL-151

- LED Power / 功率

42W / 4032 Lm

訂製品 Made to order

- Color Temperature / 色溫

3000K Ra >90 | 4000K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Wide Flood 泛光

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JL-152

- LED Power / 功率

60W / 5760 Lm

訂製品 Made to order

- Color Temperature / 色溫

3000K Ra >90 | 4000K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Wide Flood 泛光

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



JL-153

- LED Power / 功率

70W / 6720 Lm

訂製品 Made to order

- Color Temperature / 色溫

3000K Ra >90 | 4000K Ra >90 | 5000K Ra >90

- Light Distribution / 投射角度

Wide Flood 泛光

- Input / 輸入電壓

110-240V / 50~60Hz

- Color (Housing) / 機構外觀顏色

Black | White

- Dimensions / 尺寸線圖



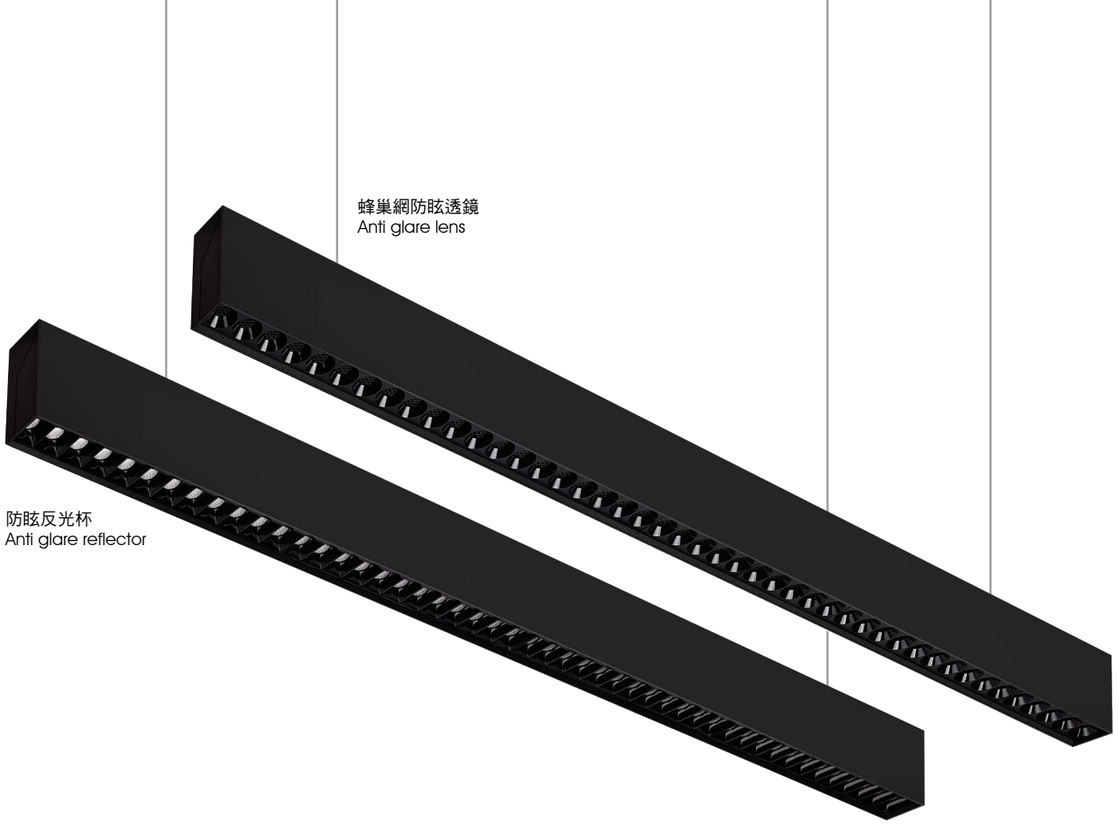

LED LINEAR SPOTLIGHTS 投射型

The LED linear fixture is a revolutionary lighting solution known for its exceptional versatility. Its most prominent feature is its multifunctionality. You can easily customize the length of the fixture and pair it with L-shaped corner pieces, allowing you to freely adjust the lighting angle as desired. Furthermore, you have the flexibility to add honeycomb grids at any time. These grids not only help prevent glare but also enhance the comfort of the lighting experience.

上下發光 下發光 上發光

- Color Temperature / 色溫
  - 3000K Ra >90
  - 4000K Ra >90
  - 5000K Ra >90
- Light Distribution / 投射角度
  - 38° Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - Black
  - White

訂製品 Made to order

JL-160 ▪ LED Power / 功率 36W



JL-161 ▪ LED Power / 功率 42W



JL-162 ▪ LED Power / 功率 50W



JL-163 ▪ LED Power / 功率 70W



- Color Temperature / 色溫
  - 3000K Ra >90
  - 4000K Ra >90
  - 5000K Ra >90
- Light Distribution / 投射角度
  - 30° Medium 中角
  - 45° Flood 寬角
- Input / 輸入電壓
  - 110-240V / 50~60Hz
- Color (Housing) / 機構外觀顏色
  - Black
  - White

訂製品 Made to order

JL-170 ▪ LED Power / 功率 36W



JL-171 ▪ LED Power / 功率 42W



JL-172 ▪ LED Power / 功率 50W



JL-173 ▪ LED Power / 功率 70W



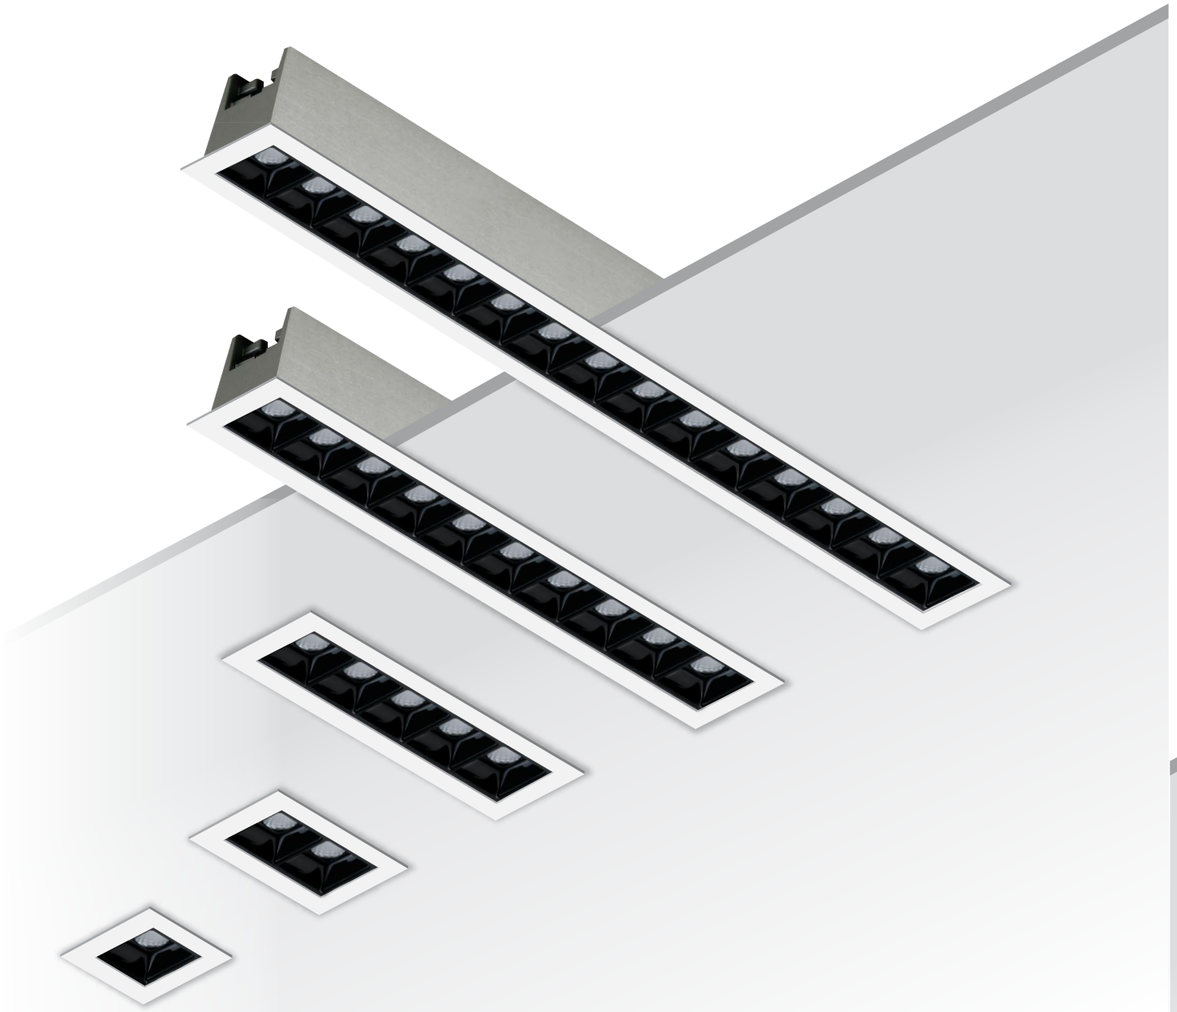

HIGH POWER

JL-C101 White ○

LED Power(W)	Luminace(Lm)	Angle(°)	CCT(K)	Input	Cut out
SMD 2W	164Lm	30°	3000K/4000K	110~240V	37 x 37



JL-C102 White ○

LED Power(W)	Luminace(Lm)	Angle(°)	CCT(K)	Input	Cut out
SMD 4W	328Lm	30°	3000K/4000K	110~240V	37 x 68



JL-C103 White ○

LED Power(W)	Luminace(Lm)	Angle(°)	CCT(K)	Input	Cut out
SMD 10W	820Lm	30°	3000K/4000K	110~240V	37 x 140



JL-C104 White ○

LED Power(W)	Luminace(Lm)	Angle(°)	CCT(K)	Input	Cut out
SMD 20W	1640Lm	30°	3000K/4000K	110~240V	37 x 273



JL-C105 White ○

LED Power(W)	Luminace(Lm)	Angle(°)	CCT(K)	Input	Cut out
SMD 30W	2460Lm	30°	3000K/4000K	110~240V	37 x 405



HIGH POWER

JL-C121 White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input	Cut out
SMD 10W	822Lm	3000K/4000K	110~240V	37 x 140

JL-C122 White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input	Cut out
SMD 20W	1644Lm	3000K/4000K	110~240V	37 x 273



JL-C123 White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input	Cut out
SMD 30W	2466Lm	3000K/4000K	110~240V	37 x 405

LED Ceiling Light

LED dimmable flush mount lights are an advanced lighting solution with numerous advantages, widely employed in various settings. What sets them apart is their adjustable brightness and color temperature, rendering them highly versatile and multifunctional. This type of luminaire boasts the following benefits:

Firstly, LED dimmable flush mount lights offer adjustable brightness, allowing for the creation of diverse lighting effects as per requirements. For instances demanding bright illumination, the brightness can be increased to provide ample light; conversely, for a soft ambiance, the brightness can be lowered to establish a comfortable environment.

Secondly, the fixture's color temperature is also adjustable, ranging from warm yellow to cool white, catering to the demands of different scenarios. In residential settings, color temperature can be tuned based on different times and activities, fostering a cozy atmosphere or a focused work environment.

LED CEILING LIGHT 居家照明系列

DIMMABLE LED CEILING LIGHT

LEDシーリングライト LED調光吸頂燈

遙控調光 | 無暗影 | 超輕薄 | 附小夜燈 | 省電 85% 高效節能 | UV 無紫外線

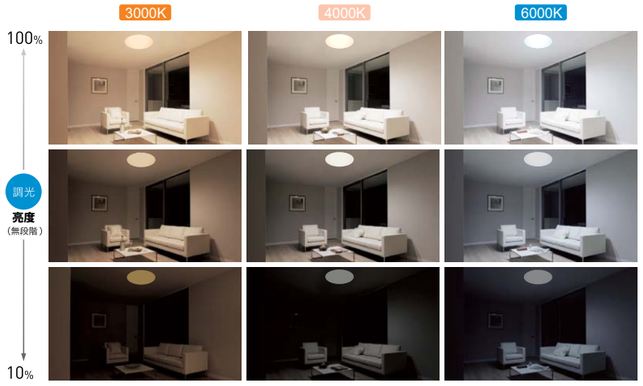

超薄設計 SLIM DESIGN

- 可減少室內空間的壓迫感也使得安裝更加容易

專業光學透鏡發光均勻

- 燈珠則採用獨立高功率擴散透鏡
- 光線均勻柔和無暗區
- 提升光效擴散照明無死角

JC-C600A White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input
SMD 45W	4500Lm	3000K~4000K~6500K	110~240V



JC-C600B White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input
SMD 45W	4500Lm	3000K~4000K~6500K	110~240V



JC-C600C White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input
SMD 45W	4500Lm	3000K~4000K~6500K	110~240V



2.4G 遙控式

開關切換式

JC-C611B White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input
SMD 30W	2500Lm	3000K~4000K~6500K	110~240V



JC-C612B White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input
SMD 30W	2500Lm	3000K~4000K~6500K	110~240V



JC-C614B White ○

LED Power(W)	Luminace(Lm)	CCT(K)	Input
SMD 30W	2500Lm	3000K~4000K~6500K	110~240V



開關切換式

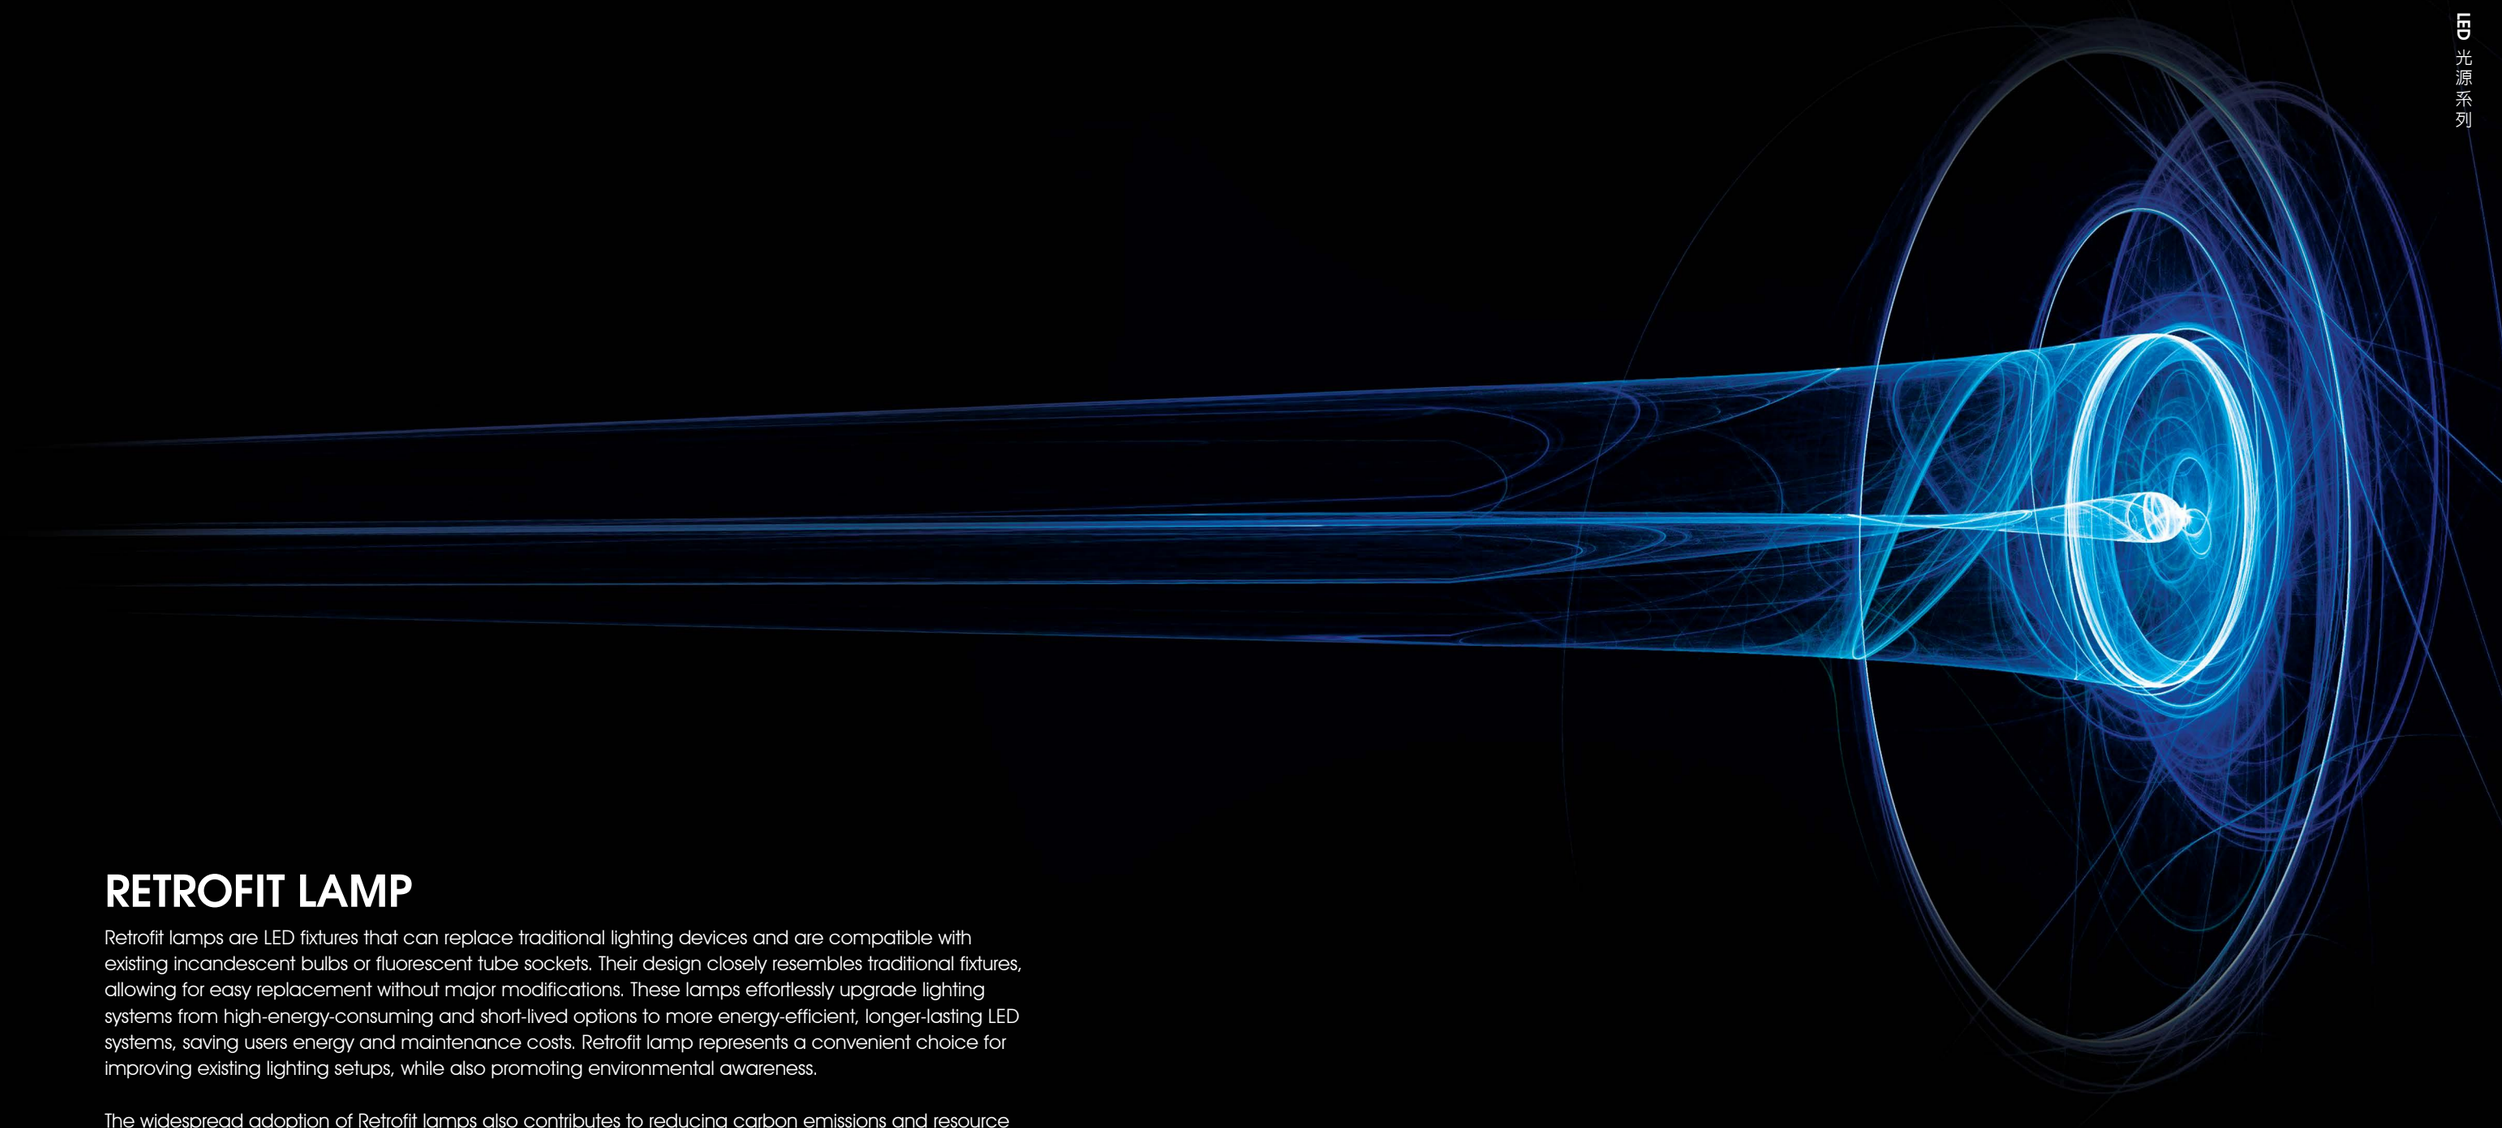

RETROFIT LAMP

Retrofit lamps are LED fixtures that can replace traditional lighting devices and are compatible with existing incandescent bulbs or fluorescent tube sockets. Their design closely resembles traditional fixtures, allowing for easy replacement without major modifications. These lamps effortlessly upgrade lighting systems from high-energy-consuming and short-lived options to more energy-efficient, longer-lasting LED systems, saving users energy and maintenance costs. Retrofit lamp represents a convenient choice for improving existing lighting setups, while also promoting environmental awareness.

The widespread adoption of Retrofit lamps also contributes to reducing carbon emissions and resource wastage, marking a significant step towards sustainable development goals. Their extensive use enhances building energy efficiency and improves the quality of indoor lighting environments, crucial for enhancing both residential and workplace comfort. Globally, the adoption of Retrofit lamps is also driving the implementation of energy efficiency policies, contributing to mitigating climate change.

LED LAMP LED 光源系列

JB-C811

- LED Power / 功率
  12W / 1057 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
  Tuneable White
- Light Distribution / 投射角度
  Super Narrow 超窄角(訂製) Narrow 窄角
  Medium 中角 Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White



26° Field Angle **12W**



32° Field Angle **12W**



39° Field Angle **12W**



JB-C812

- LED Power / 功率
  15W / 1238 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White



26° Field Angle **15W**



32° Field Angle **15W**



40° Field Angle **15W**



JB-C810

- LED Power / 功率
  5W / 440 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
- Light Distribution / 投射角度
  Narrow 窄角 Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz



14° Field Angle **5W**



40° Field Angle **5W**



JB-602

- LED Power / 功率
  6W / 420 Lm
- Color Temperature / 色溫
  3000K Ra >80 5700K Ra >80
- Color Options / 訂製色溫
  2700K Ra >80 4000K Ra >80
- Light Distribution / 投射角度
  Medium 中角
- Input / 輸入電壓
  DC 12V



30° Field Angle **6W**



JB-602-E27
Size:Ø50x65mm
Input:AC110~240V

JB-602-GU10
Size:Ø50x58mm
Input:AC110~240V

JB-602-泛光型
Size:Ø50x50mm
Input:DC12V

JB-603

- LED Power / 功率
  6W / 420 Lm
- Color Temperature / 色溫
  3000K Ra >80 5700K Ra >80
- Color Options / 訂製色溫
  2700K Ra >80 4000K Ra >80
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  DC 12V



15° Field Angle **6W**



25° Field Angle **6W**



45° Field Angle **6W**



JB-701

- LED Power / 功率
  6W / 420 Lm
- Color Temperature / 色溫
  3000K Ra >80 5700K Ra >80
- Color Options / 訂製色溫
  2700K Ra >80 4000K Ra >80
- Light Distribution / 投射角度
  Medium 中角
- Input / 輸入電壓
  110-240V / 50~60Hz



30° Field Angle **6W**



JB-701-泛光型
Size:Ø50x30mm
Input:AC110~240V

JB-C821

- LED Power / 功率
  15W / 1127 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-C825

- LED Power / 功率
  15W / 1363 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-C827

- LED Power / 功率
  15W / 1127 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-C828

- LED Power / 功率
  15W / 1363 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-C826

- LED Power / 功率
  15W / 1127 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-C829

- LED Power / 功率
  18W / 1843 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >80
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-C840 超薄款

- LED Power / 功率
  10W / 938 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >90
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-C843 超薄款

- LED Power / 功率
  10W / 938 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >90
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-C846 超薄款

- LED Power / 功率
  12W / 1119 Lm
- Color Temperature / 色溫
  3000K Ra >90 3500K Ra >90
  4000K Ra >90
- Color Options / 訂製色溫
  2700K Ra >90 5000K Ra >90
  Tuneable White
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
  Flood 寬角
- Input / 輸入電壓
  110-240V / 50~60Hz
- Control / 控制
  TRAIC DALI
  0-10V Tuneable White









JB-802

- LED Power / 功率
  12W / 960 Lm
- Color Temperature / 色溫
  3000K Ra >80 5700K Ra >80
- Color Options / 訂製色溫
  2700K Ra >80 4000K Ra >80
- Light Distribution / 投射角度
  Medium 中角
- Input / 輸入電壓
  110-240V / 50~60Hz





JB-806

- LED Power / 功率
  15W / 1280 Lm
- Color Temperature / 色溫
  3000K Ra >80 5700K Ra >80
- Color Options / 訂製色溫
  2700K Ra >80 4000K Ra >80
- Light Distribution / 投射角度
  Medium 中角
- Input / 輸入電壓
  110-240V / 50~60Hz





JB-C830

- LED Power / 功率

15W / 1532 Lm

- Color Temperature / 色溫

3000K Ra >90 3500K Ra >90
4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 5000K Ra >80
Tuneable White

- Light Distribution / 投射角度

Narrow 窄角 Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC DALI
0-10V Tuneable White







JB-C831

- LED Power / 功率

20W / 2152 Lm

- Color Temperature / 色溫

3000K Ra >90 3500K Ra >90
4000K Ra >90

- Color Options / 訂製色溫

2700K Ra >90 5000K Ra >80
Tuneable White

- Light Distribution / 投射角度

Narrow 窄角 Medium 中角
Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz

- Control / 控制

TRAIC DALI
0-10V Tuneable White









JB-511

- LED Power / 功率

9W / 740 Lm

- Color Temperature / 色溫

3000K Ra >80 5700K Ra >80

- Color Options / 訂製色溫

2700K Ra >80 4000K Ra >80

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz





JB-512

- LED Power / 功率

12W / 950 Lm

- Color Temperature / 色溫

3000K Ra >80 5700K Ra >80

- Color Options / 訂製色溫

2700K Ra >80 4000K Ra >80

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz





JB-513

- LED Power / 功率

15W / 1158 Lm

- Color Temperature / 色溫

3000K Ra >80 5700K Ra >80

- Color Options / 訂製色溫

2700K Ra >80 4000K Ra >80

- Light Distribution / 投射角度

Medium 中角

- Input / 輸入電壓

110-240V / 50~60Hz





JB-503

- LED Power / 功率

12W / 950 Lm

- Color Temperature / 色溫

3000K Ra >80 5700K Ra >80

- Color Options / 訂製色溫

2700K Ra >80 4000K Ra >80

- Light Distribution / 投射角度

Narrow 窄角 Medium 中角
Flood 寬角

- Input / 輸入電壓

110-240V / 50~60Hz









JB-504

- LED Power / 功率
  12W / 950 Lm
- Color Temperature / 色溫
  3000K Ra >80 5700K Ra >80
- Color Options / 訂製色溫
  2700K Ra >80 4000K Ra >80
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
- Input / 輸入電壓
  110-240V / 50~60Hz







JB-505

- LED Power / 功率
  12W / 950 Lm
- Color Temperature / 色溫
  3000K Ra >80 5700K Ra >80
- Color Options / 訂製色溫
  2700K Ra >80 4000K Ra >90
- Light Distribution / 投射角度
  Wide Flood 泛光
- Input / 輸入電壓
  110-240V / 50~60Hz





JB-507

- LED Power / 功率
  23W / 2000 Lm
- Color Temperature / 色溫
  3000K Ra >80 5700K Ra >80
- Color Options / 訂製色溫
  2700K Ra >80 4000K Ra >80
- Light Distribution / 投射角度
  Narrow 窄角 Medium 中角
- Input / 輸入電壓
  110-240V / 50~60Hz







LED 層板燈系列 特製 超亮版

JM-901

1呎	5W	3000K	400lm	AC100~240Vac	L325mm x W20mm x H35mm
1呎	5W	4000K	415lm	AC100~240Vac	L325mm x W20mm x H35mm
1呎	5W	白光	425lm	AC100~240Vac	L325mm x W20mm x H35mm
2呎	10W	3000K	800lm	AC100~240Vac	L570mm x W20mm x H35mm
2呎	10W	4000K	825lm	AC100~240Vac	L570mm x W20mm x H35mm
2呎	10W	白光	850lm	AC100~240Vac	L570mm x W20mm x H35mm
3呎	15W	3000K	1200lm	AC100~240Vac	L885mm x W20mm x H35mm
3呎	15W	4000K	1245lm	AC100~240Vac	L885mm x W20mm x H35mm
3呎	15W	白光	1275lm	AC100~240Vac	L885mm x W20mm x H35mm
4呎	20W	3000K	1600lm	AC100~240Vac	L1180mm x W20mm x H35mm
4呎	20W	4000K	1650lm	AC100~240Vac	L1180mm x W20mm x H35mm
4呎	20W	白光	1700lm	AC100~240Vac	L1180mm x W20mm x H35mm

軌道燈改崁入式配件

JP-75001(WH)
JP-75002(BK)

Cut out
Ø75mm



JP-95001(WH)
JP-95002(BK)

Cut out
Ø95mm



軌道燈改明裝固定式配件

JP-95401(WH)
JP-95402(BK)

Size
Ø95*40mm



JP-60001(WH)
JP-60002(BK)

Size
Ø60*12mm



吸頂式加長桿配件系列

JP-77001(WH)
JP-77002(BK)

Size
Ø77*530~1000mm



JP-77003(WH)
JP-77004(BK)

Size
Ø77*350~700mm



JP-80301(WH)
JP-80302(BK)

Size
80*30mm